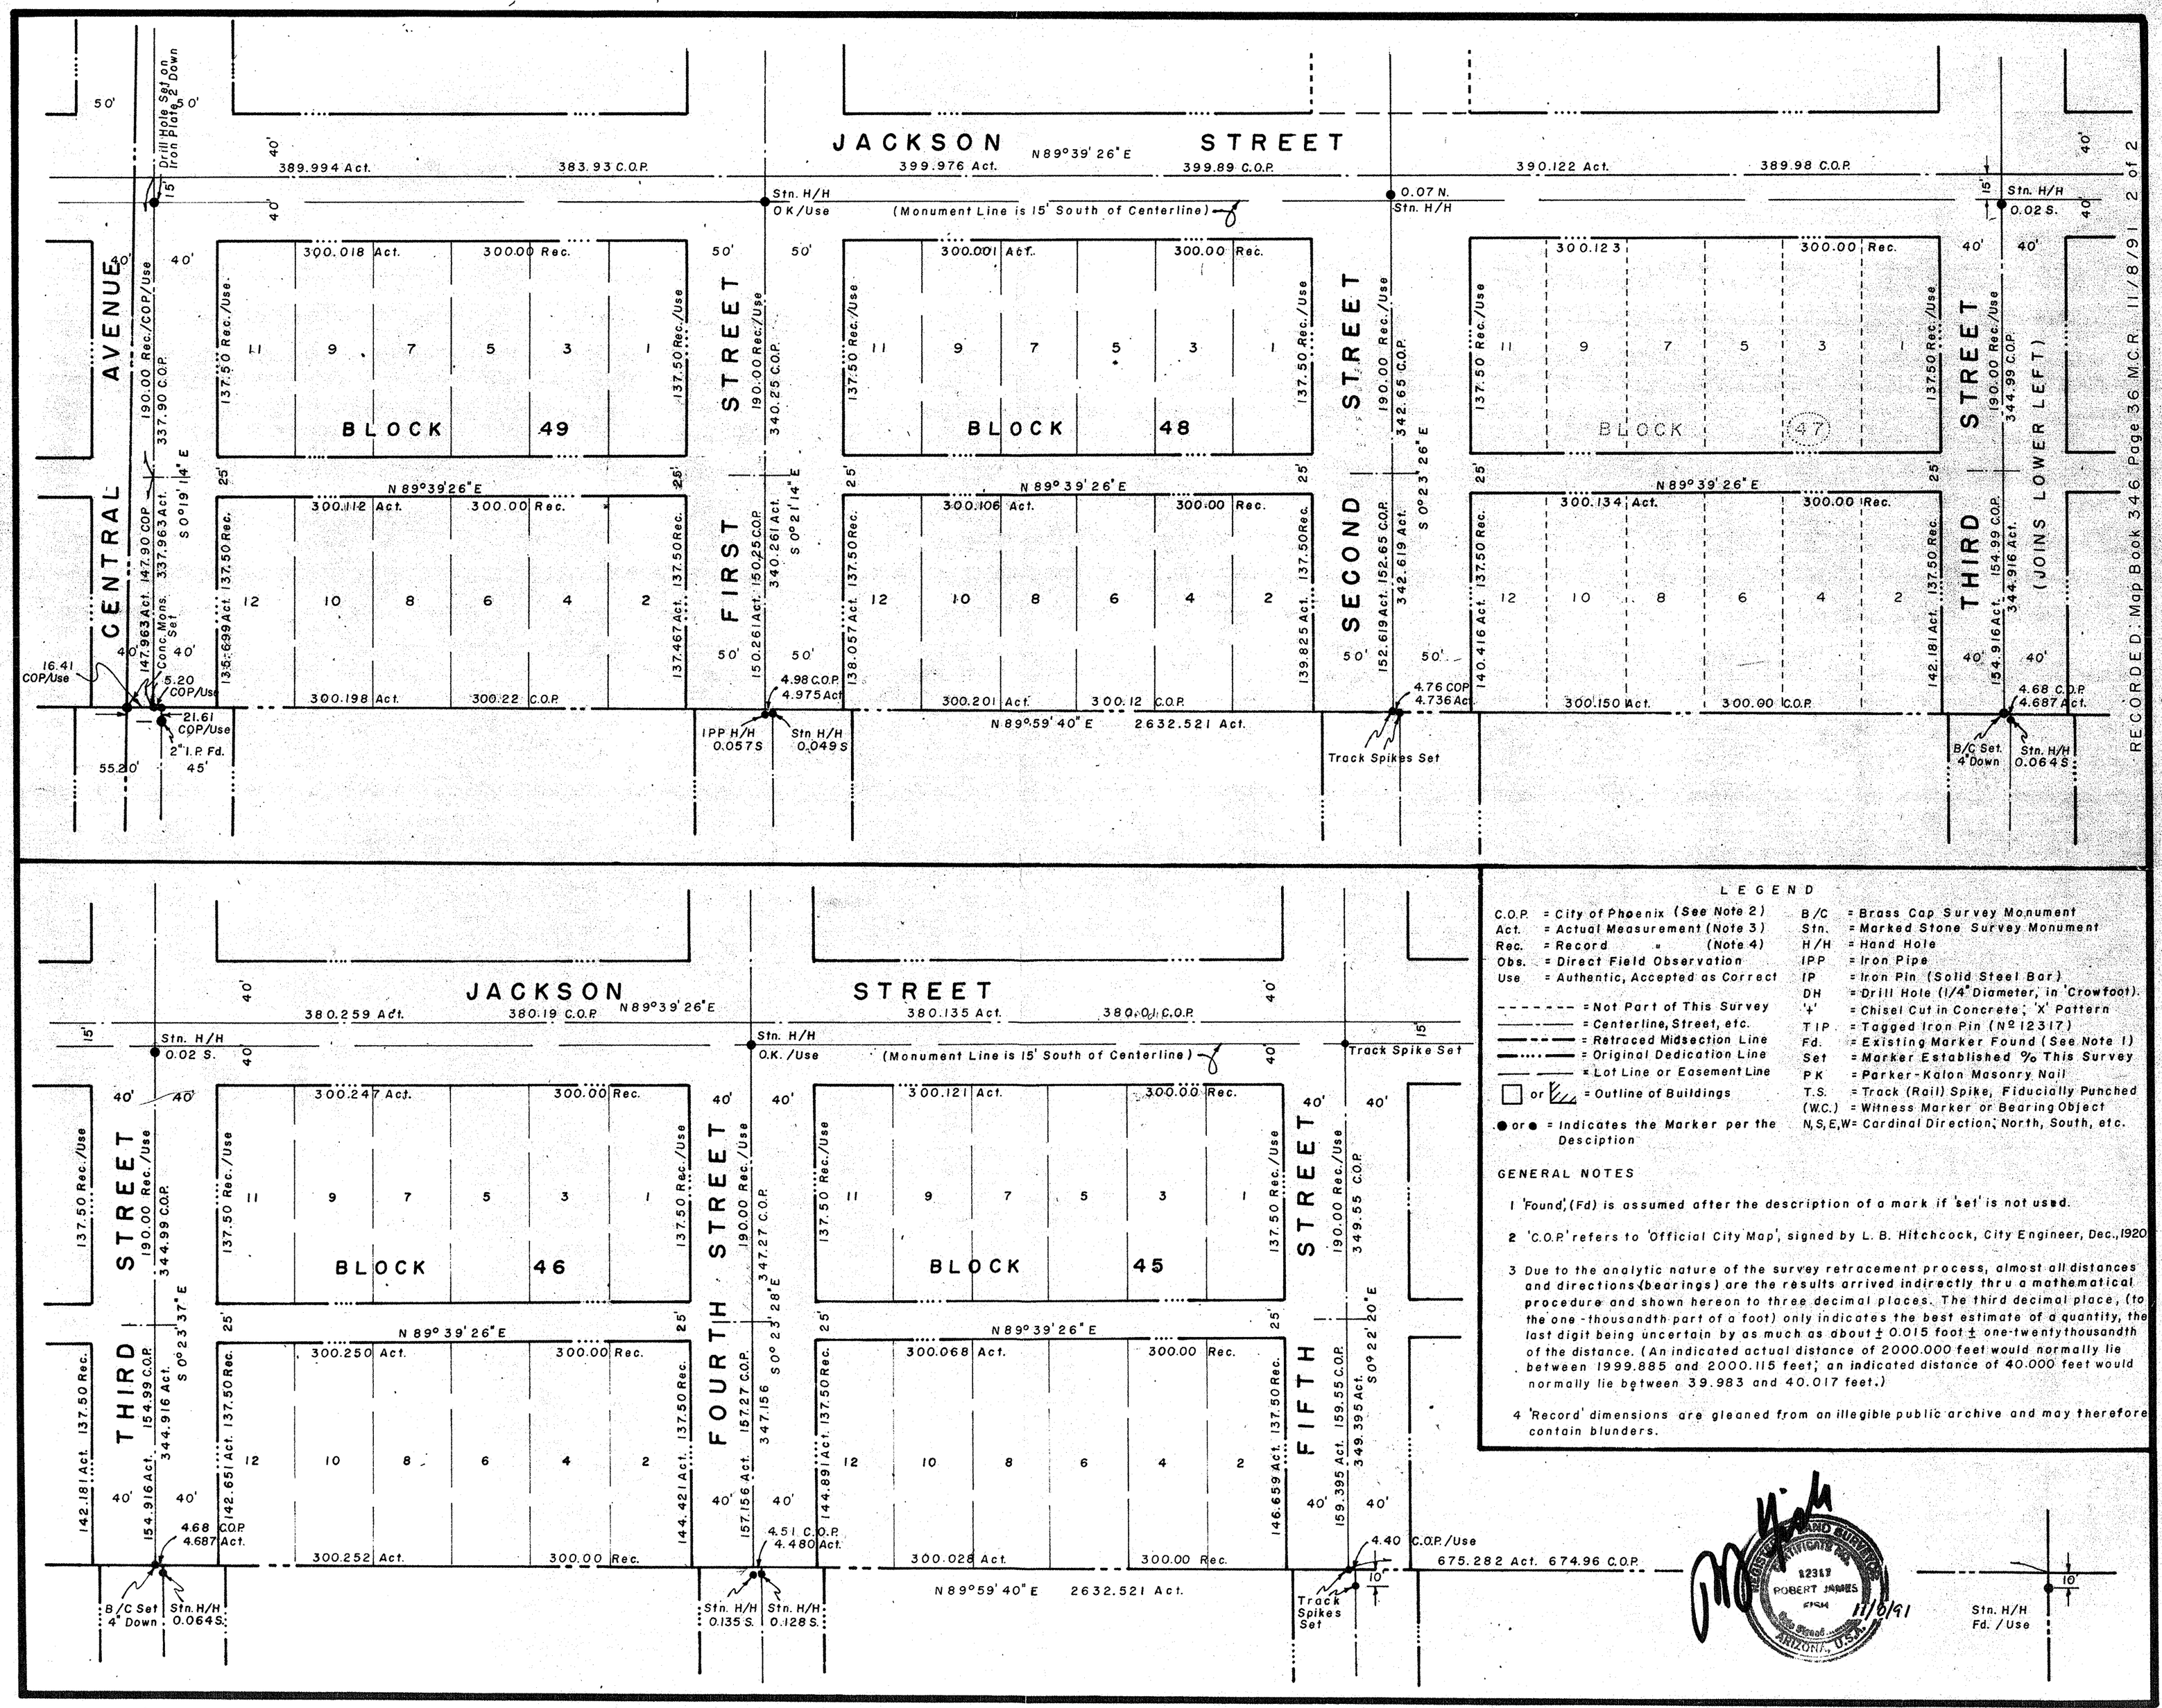

LEGEND

C.O.P.	= City of Phoenix (See Note 2)	B/C	= Brass Cap Survey Monument
Act.	= Actual Measurement (Note 3)	Stn.	= Marked Stone Survey Monument
Rec.	= Record " (Note 4)	H/H	= Hand Hole
Obs.	= Direct Field Observation	IPP	= Iron Pipe
Use	= Authentic, Accepted as Correct	IP	= Iron Pin (Solid Steel Bar)
		DH	= Drill Hole (1/4" Diameter, in 'Crowfoot')
- - - - - -	= Not Part of This Survey	'+'	= Chisel Cut in Concrete; 'X' Pattern
	= Centerline, Street, etc.	TIP	= Tagged Iron Pin (№ 12317)
	= Retraced Midsection Line	Fd.	= Existing Marker Found (See Note 1)
	= Original Dedication Line	Set	= Marker Established % This Survey
	= Lot Line or Easement Line	PK	= Parker-Kalon Masonry Nail
□ or	= Outline of Buildings	T.S.	= Track (Rail) Spike, Fiducially Punched
		(W.C.)	= Witness Marker or Bearing Object
● or ●	= Indicates the Marker per the Description	N,S,E,W	= Cardinal Direction, North, South, etc.

GENERAL NOTES

1 'Found', (Fd) is assumed after the description of a mark if 'set' is not used.

2 'C.O.P.' refers to 'Official City Map', signed by L. B. Hitchcock, City Engineer, Dec., 1920

3 Due to the analytic nature of the survey retracement process, almost all distances and directions (bearings) are the results arrived indirectly thru a mathematical procedure and shown hereon to three decimal places. The third decimal place, (to the one-thousandth part of a foot) only indicates the best estimate of a quantity, the last digit being uncertain by as much as about ± 0.015 foot ± one-twentythousandth of the distance. (An indicated actual distance of 2000.000 feet would normally lie between 1999.885 and 2000.115 feet; an indicated distance of 40.000 feet would normally lie between 39.983 and 40.017 feet.)

4 'Record' dimensions are gleaned from an illegible public archive and may therefore contain blunders.

D/N # 58086-4