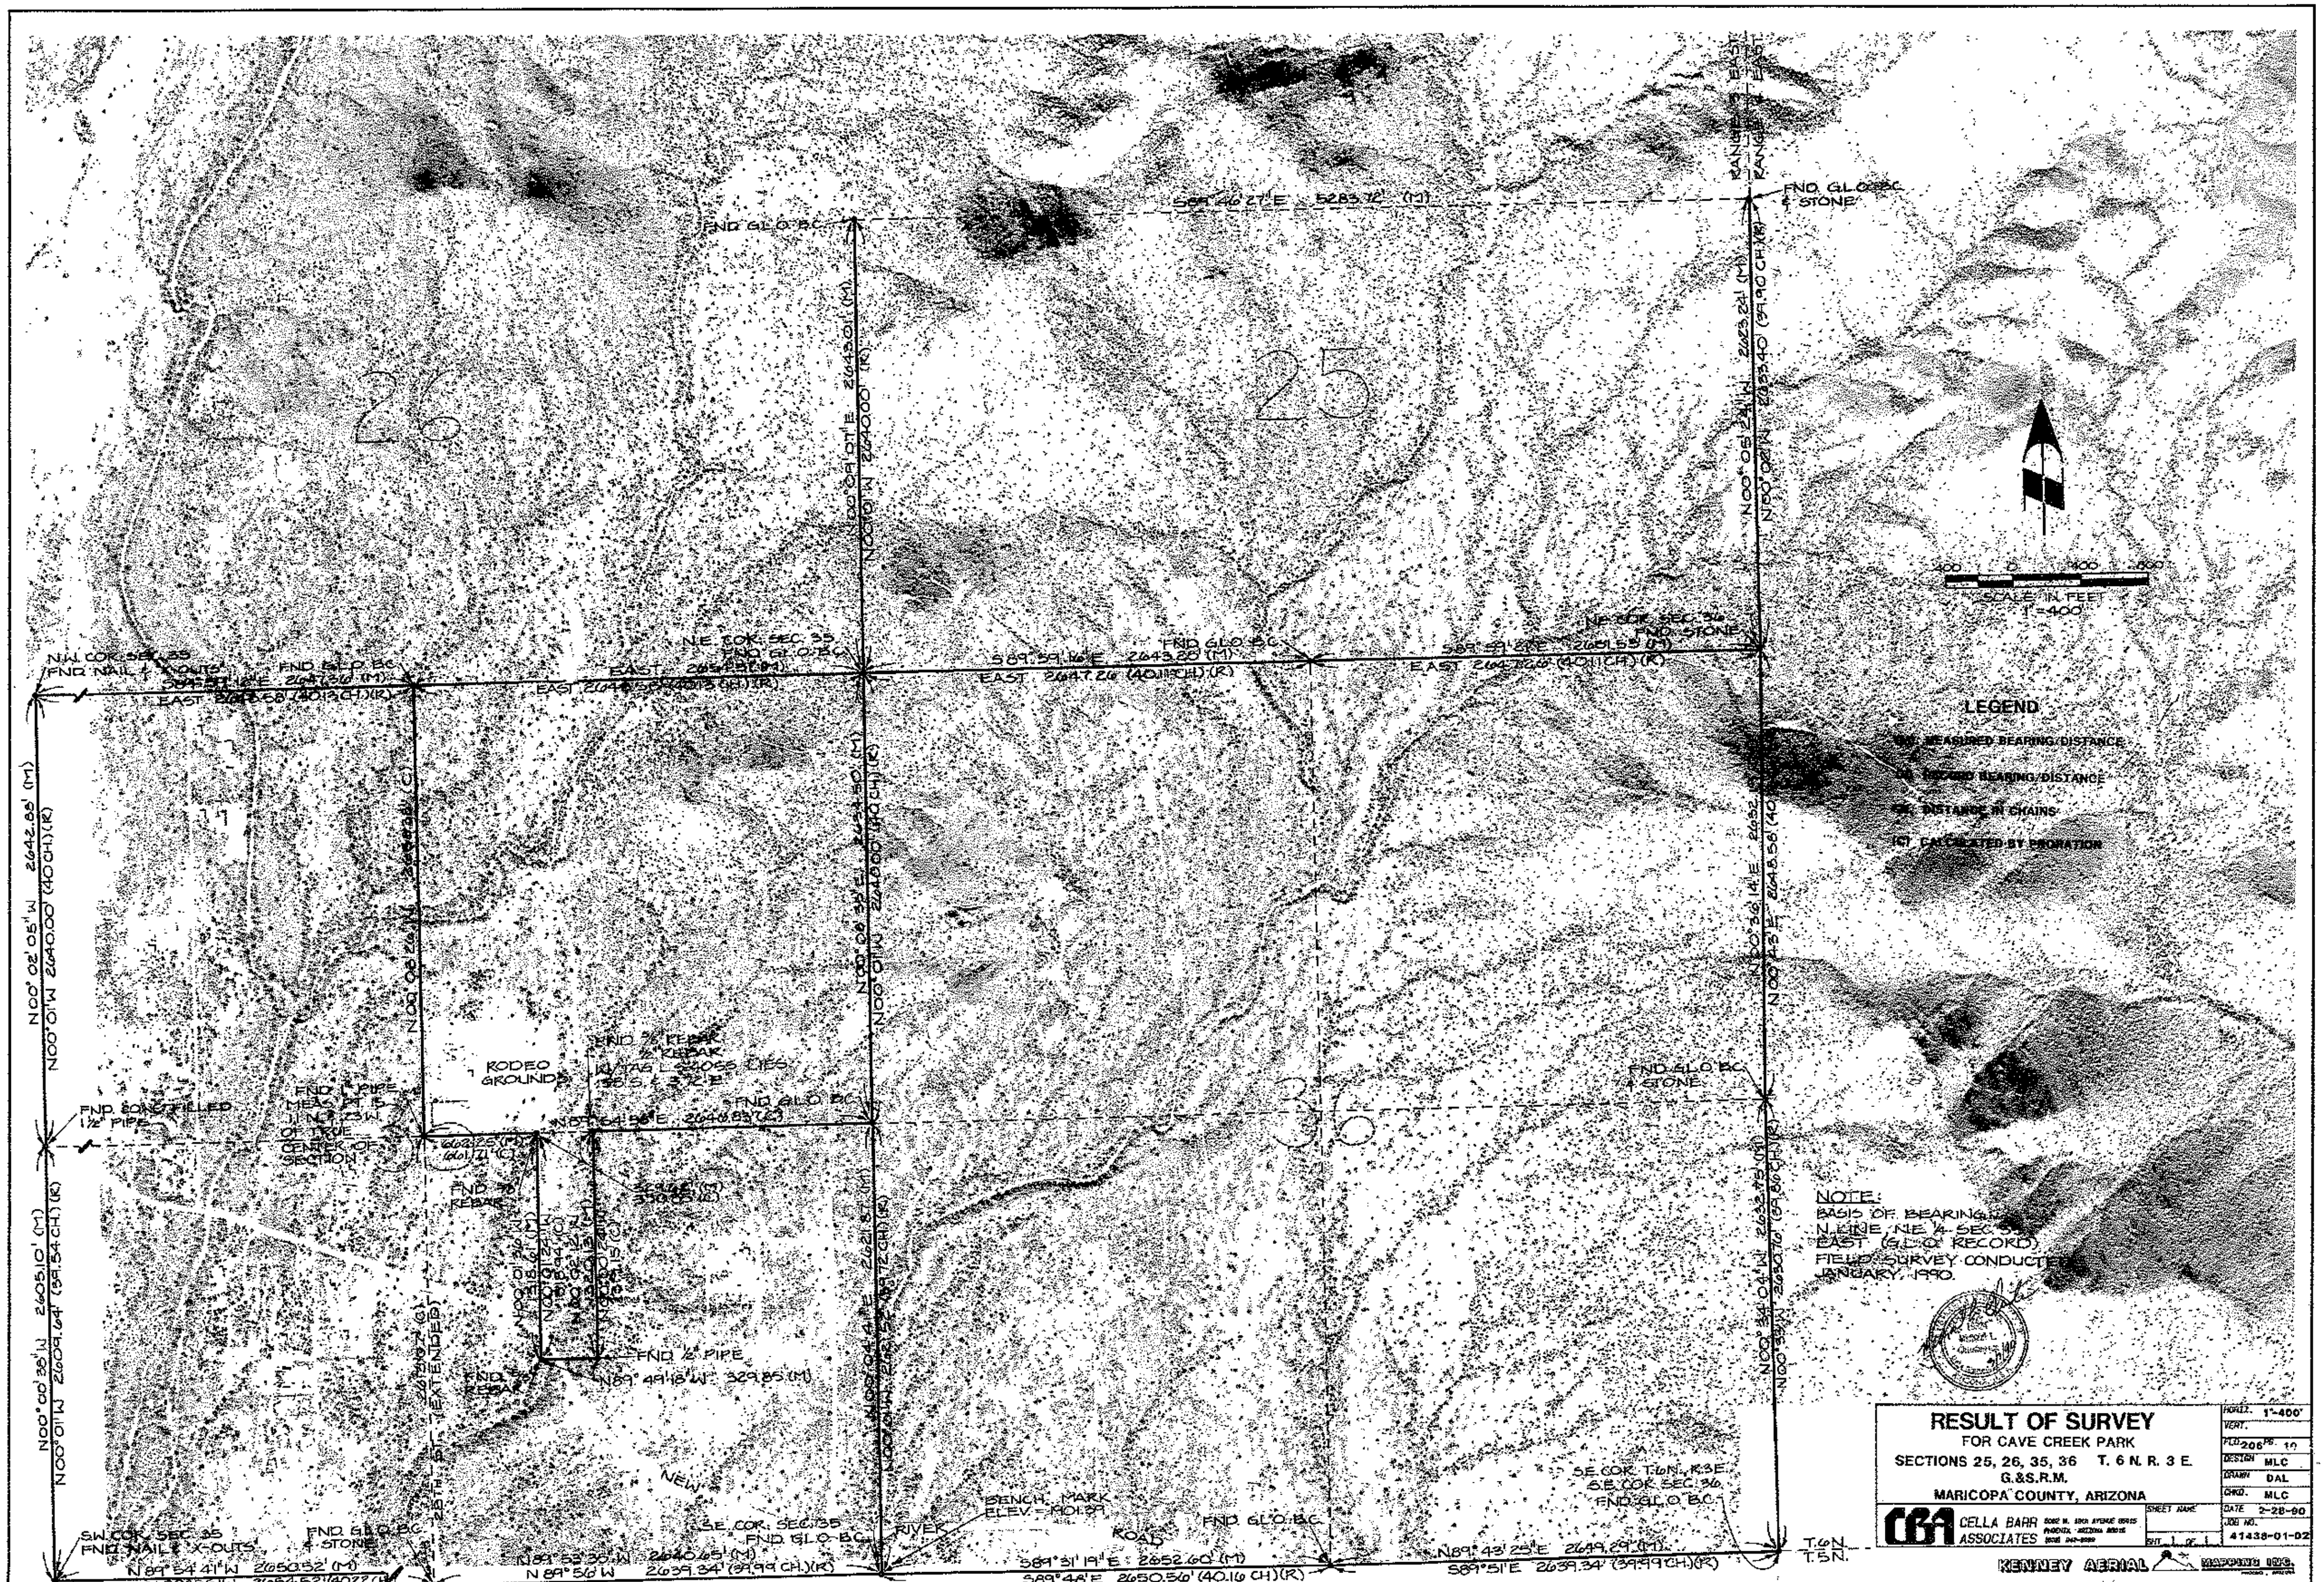
RESULT OF SURVEY
FOR CAVE CREEK PARK
SECTIONS 25, 26, 35, 36 T. 6 N. R. 3 E.
G.&S.R.M.
MARICOPA COUNTY, ARIZONA
CELLA BARR ASSOCIATES
HORIZ. 1"=400'
FLD 206 PG. 10
DESIGN MLC
DRAWN DAL
CHKD. MLC
DATE 2-28-90
JOB NO. 41438-01-02
SHT. 1 OF 1
KENNEY AERIAL MAPPING INC.
LEGEND
(M) MEASURED BEARING/DISTANCE
(R) RECORD BEARING/DISTANCE
(CH) DISTANCE IN CHAINS
(C) CALCULATED BY PRORATION
SCALE IN FEET
1"=400'
NOTE:
BASIS OF BEARING:
N. LINE, NE 1/4 SEC. 35
EAST (G.L.O. RECORD)
FIELD SURVEY CONDUCTED
JANUARY, 1990.
26
25
36
RANGE 3 EAST
RANGE 4 EAST
FND. G.L.O. B.C. & STONE
S89°46'27"E 5283.72' (M)
FND GLO B.C.
N00°07'07"E 2643.01' (M)
N00°01'W 2640.00' (R)
N00°05'24"W 2623.24' (M)
N00°02'W 2633.40' (39.90 CH.)(R)
N.W. COR. SEC. 35
FND NAIL & X-OUTS
FND GLO BC
EAST 2643.58' (40.13 CH.)(R)
N.E. COR. SEC. 35
FND GLO BC
S89°59'16"E 2643.20' (M)
EAST 2647.26' (40.11 CH.)(R)
NE COR. SEC. 36
FND STONE
EAST 2647.26' (40.11 CH.)(R)
N00°02'05"W 2642.85' (M)
N00°01'W 2640.00' (40 CH.)(R)
N00°00'38"W 2605.10' (M)
N00°01'W 2609.64' (39.54 CH.)(R)
FND. CONC. FILLED 1½" PIPE
FND 1" PIPE
MEAS. PT. IS 1.1 N. & 2.3 W. OF TRUE CENTER OF SECTION
RODEO GROUNDS
FND 5/8" REBAR
W/TAG LS 24055 LIES 38' S. & 3.2' E.
FND GLO BC
2640.83' (C)
662.25' (M)
661.71' (C)
FND 5/8" REBAR
FND 1/2" PIPE
N89°49'18"W 329.85' (M)
FND 5/8" REBAR
25TH ST. (EXTENDED)
N00°04'41"E 2621.87' (M)
SW. COR. SEC. 35
FND NAIL & X-OUTS
FND GLO BC & STONE
N89°54'41"W 2650.52' (M)
N89°55'W 2654.52' (40.22 CH.)(R)
N89°53'30"W 2640.65' (M)
N89°56'W 2639.34' (39.99 CH.)(R)
S.E. COR. SEC. 35
FND GLO BC
NEW RIVER ROAD
BENCH MARK
ELEV. = 1901.39
FND GLO BC
S89°31'19"E 2652.60' (M)
S89°48'E 2650.56' (40.16 CH.)(R)
N89°43'25"E 2649.29' (M)
S89°51'E 2639.34' (39.99 CH.)(R)
S.E. COR. T.6N., R.3E.
S.E. COR. SEC. 36
FND GLO BC
FND GLO BC & STONE
N00°36'14"E 2652.10' (M)
N00°34'04"W 2632.75' (M)
N00°33'W 2630.76' (39.86 CH.)(R)
T.6N.
T.5N.

DIN #55207-1