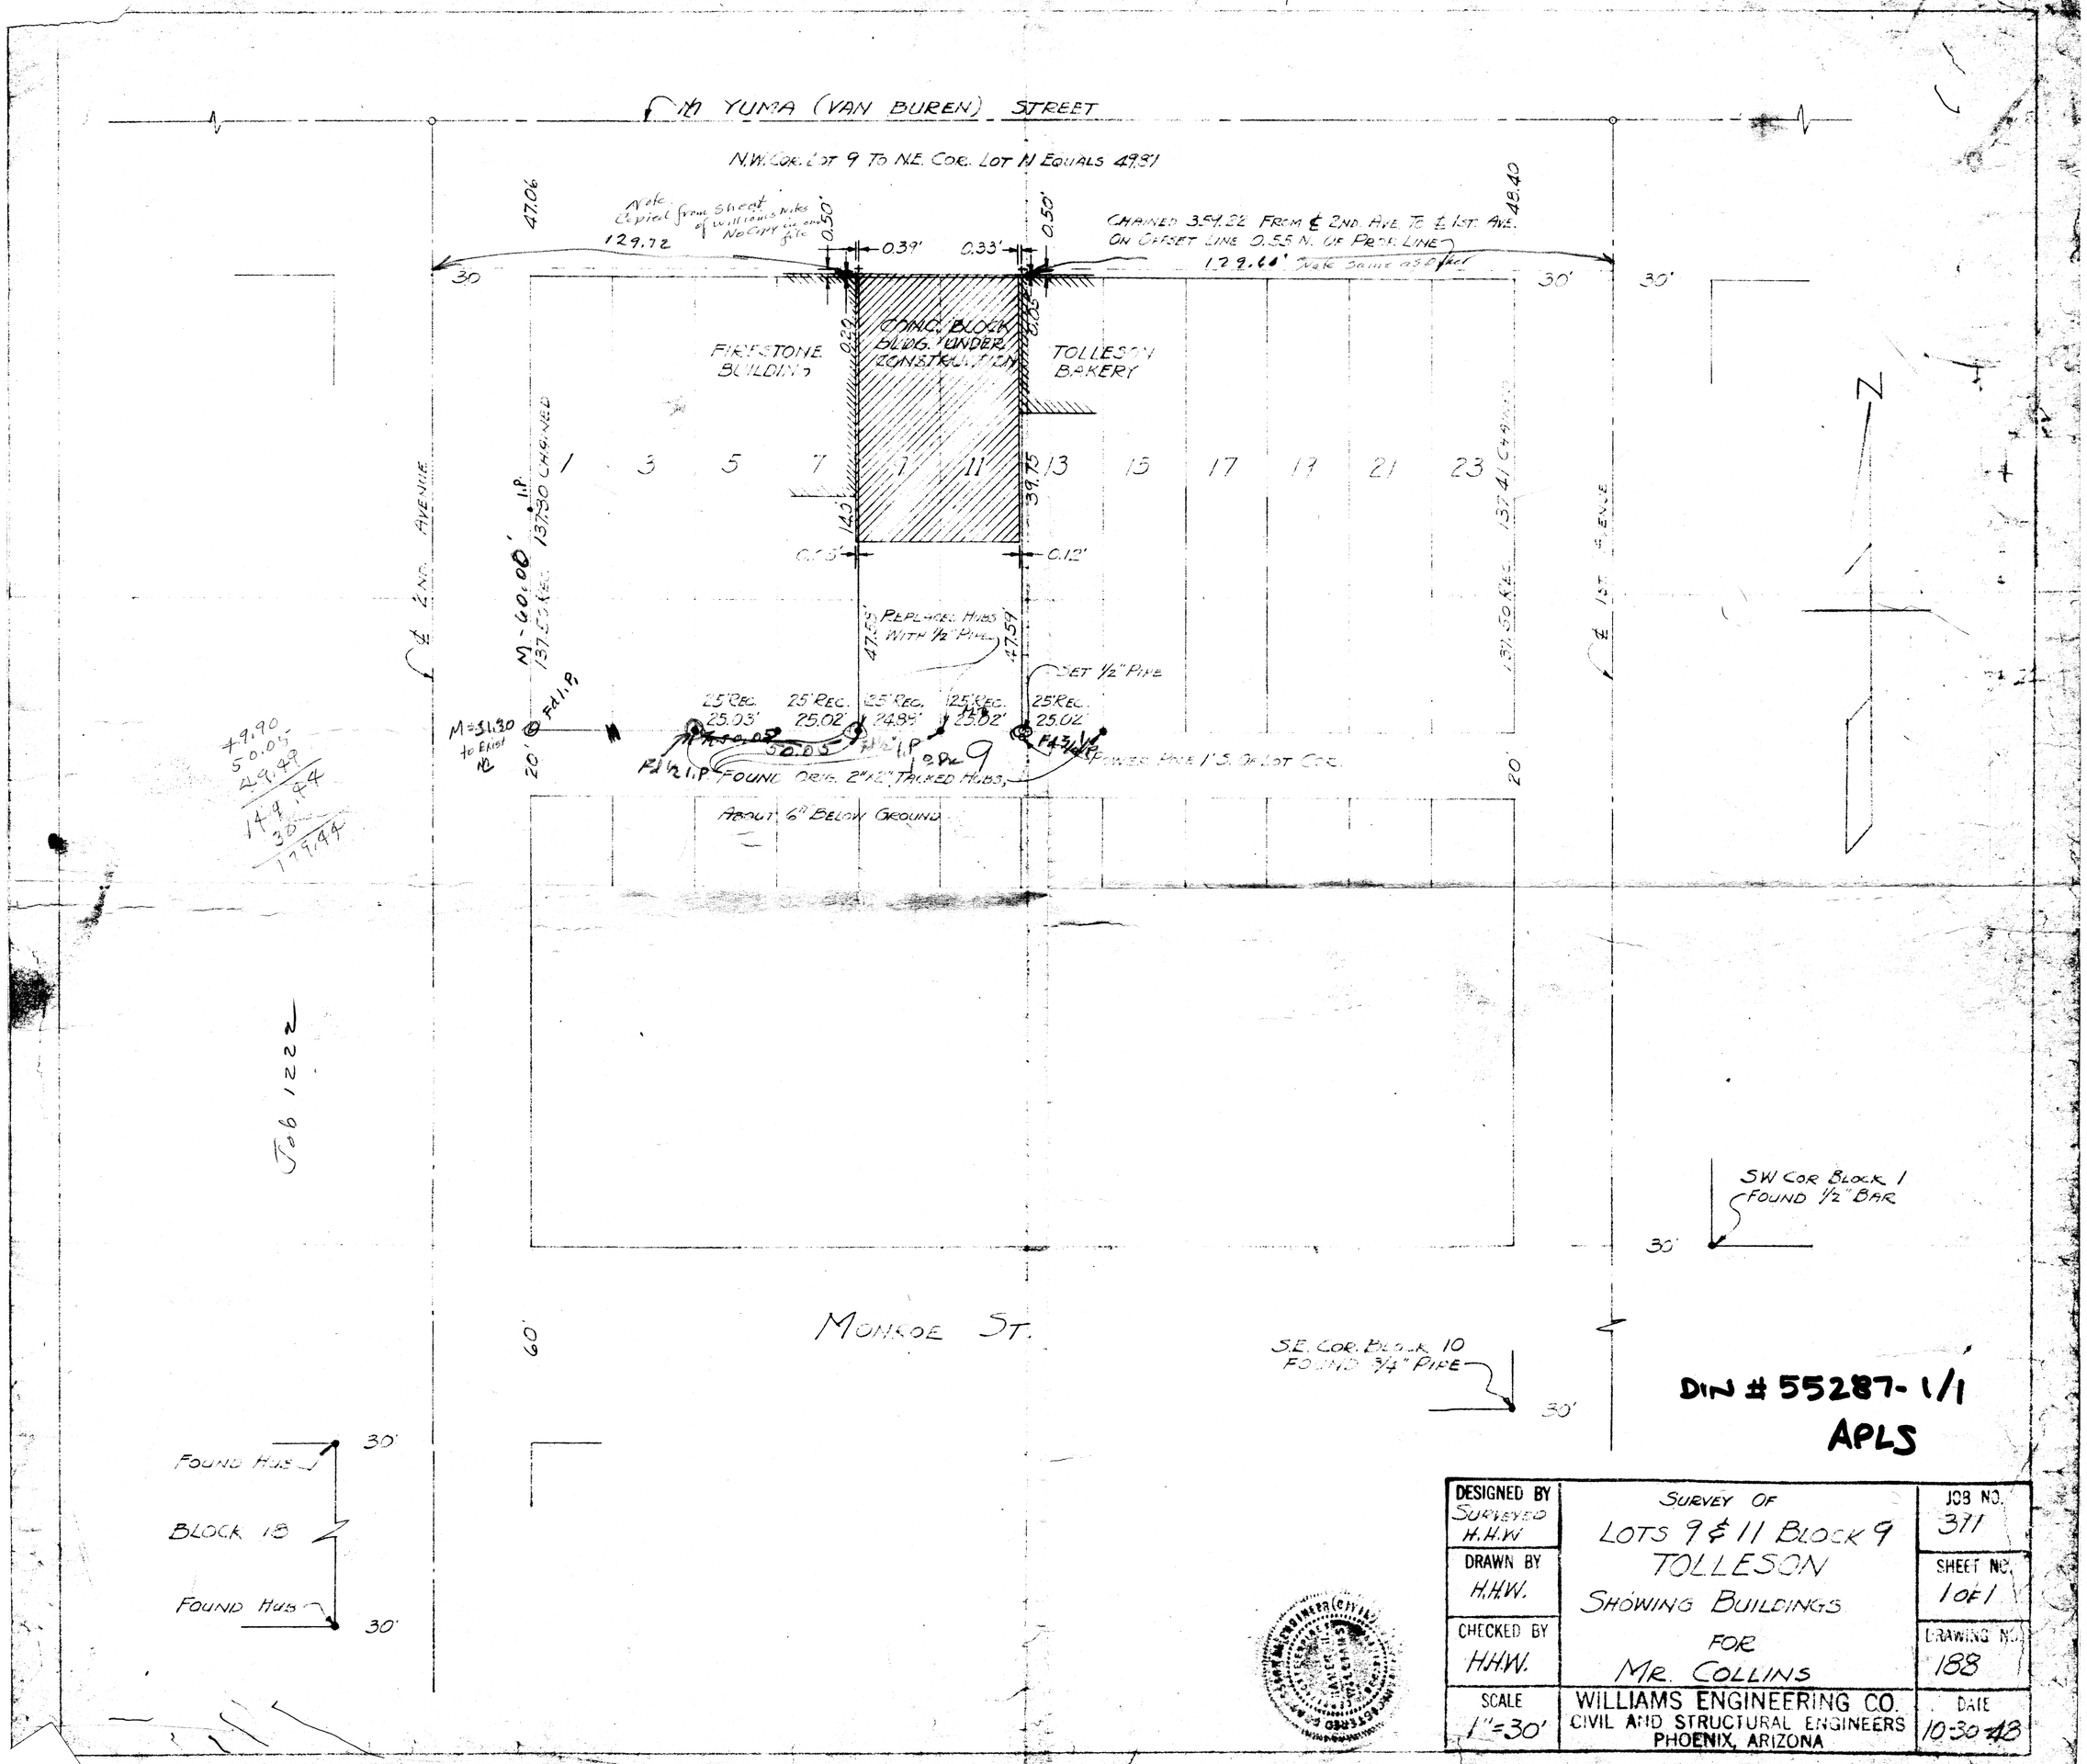

YUMA (VAN BUREN) STREET
N.W. COR. LOT 9 TO N.E. COR. LOT 11 EQUALS 49.81
Note Copied from Sheet of Williams Notes No Copy in our file
129.72
CHAINED 359.22 FROM ℄ 2ND. AVE. TO ℄ 1ST. AVE. ON OFFSET LINE 0.55 N. OF PROP. LINE
129.60' Note same as Other
FIRESTONE BUILDING
CONC. BLOCK BLDG. UNDER CONSTRUCTION
TOLLESON BAKERY
℄ 2ND. AVENUE
℄ 1ST. AVENUE
M-60.00' 137.30 CHAINED
137.50 REC.
137.41 CHAINED
REPLACED HUBS WITH 1/2" PIPE
SET 1/2" PIPE
25' REC. 25.03'
25' REC. 25.02'
25' REC. 24.89'
25' REC. 25.02'
25' REC. 25.02'
M=51.30 to Exist
FOUND ORIG. 2"x2" TACKED HUBS, ABOUT 6" BELOW GROUND
POWER POLE 1' S. OF LOT COR.
49.90
50.05
49.49
149.44
30
179.44
Job 1222
SW COR BLOCK 1 FOUND 1/2" BAR
MONROE ST.
S.E. COR. BLOCK 10 FOUND 3/4" PIPE
FOUND HUB
BLOCK 18
FOUND HUB
DIN # 55287-1/1
APLS
DESIGNED BY Surveyed H.H.W
DRAWN BY H.H.W.
CHECKED BY H.H.W.
SCALE 1"=30'
SURVEY OF LOTS 9 & 11 BLOCK 9 TOLLESON SHOWING BUILDINGS FOR MR. COLLINS
WILLIAMS ENGINEERING CO. CIVIL AND STRUCTURAL ENGINEERS PHOENIX, ARIZONA
JOB NO. 371
SHEET NO. 1 OF 1
DRAWING NO. 188
DATE 10-30-48