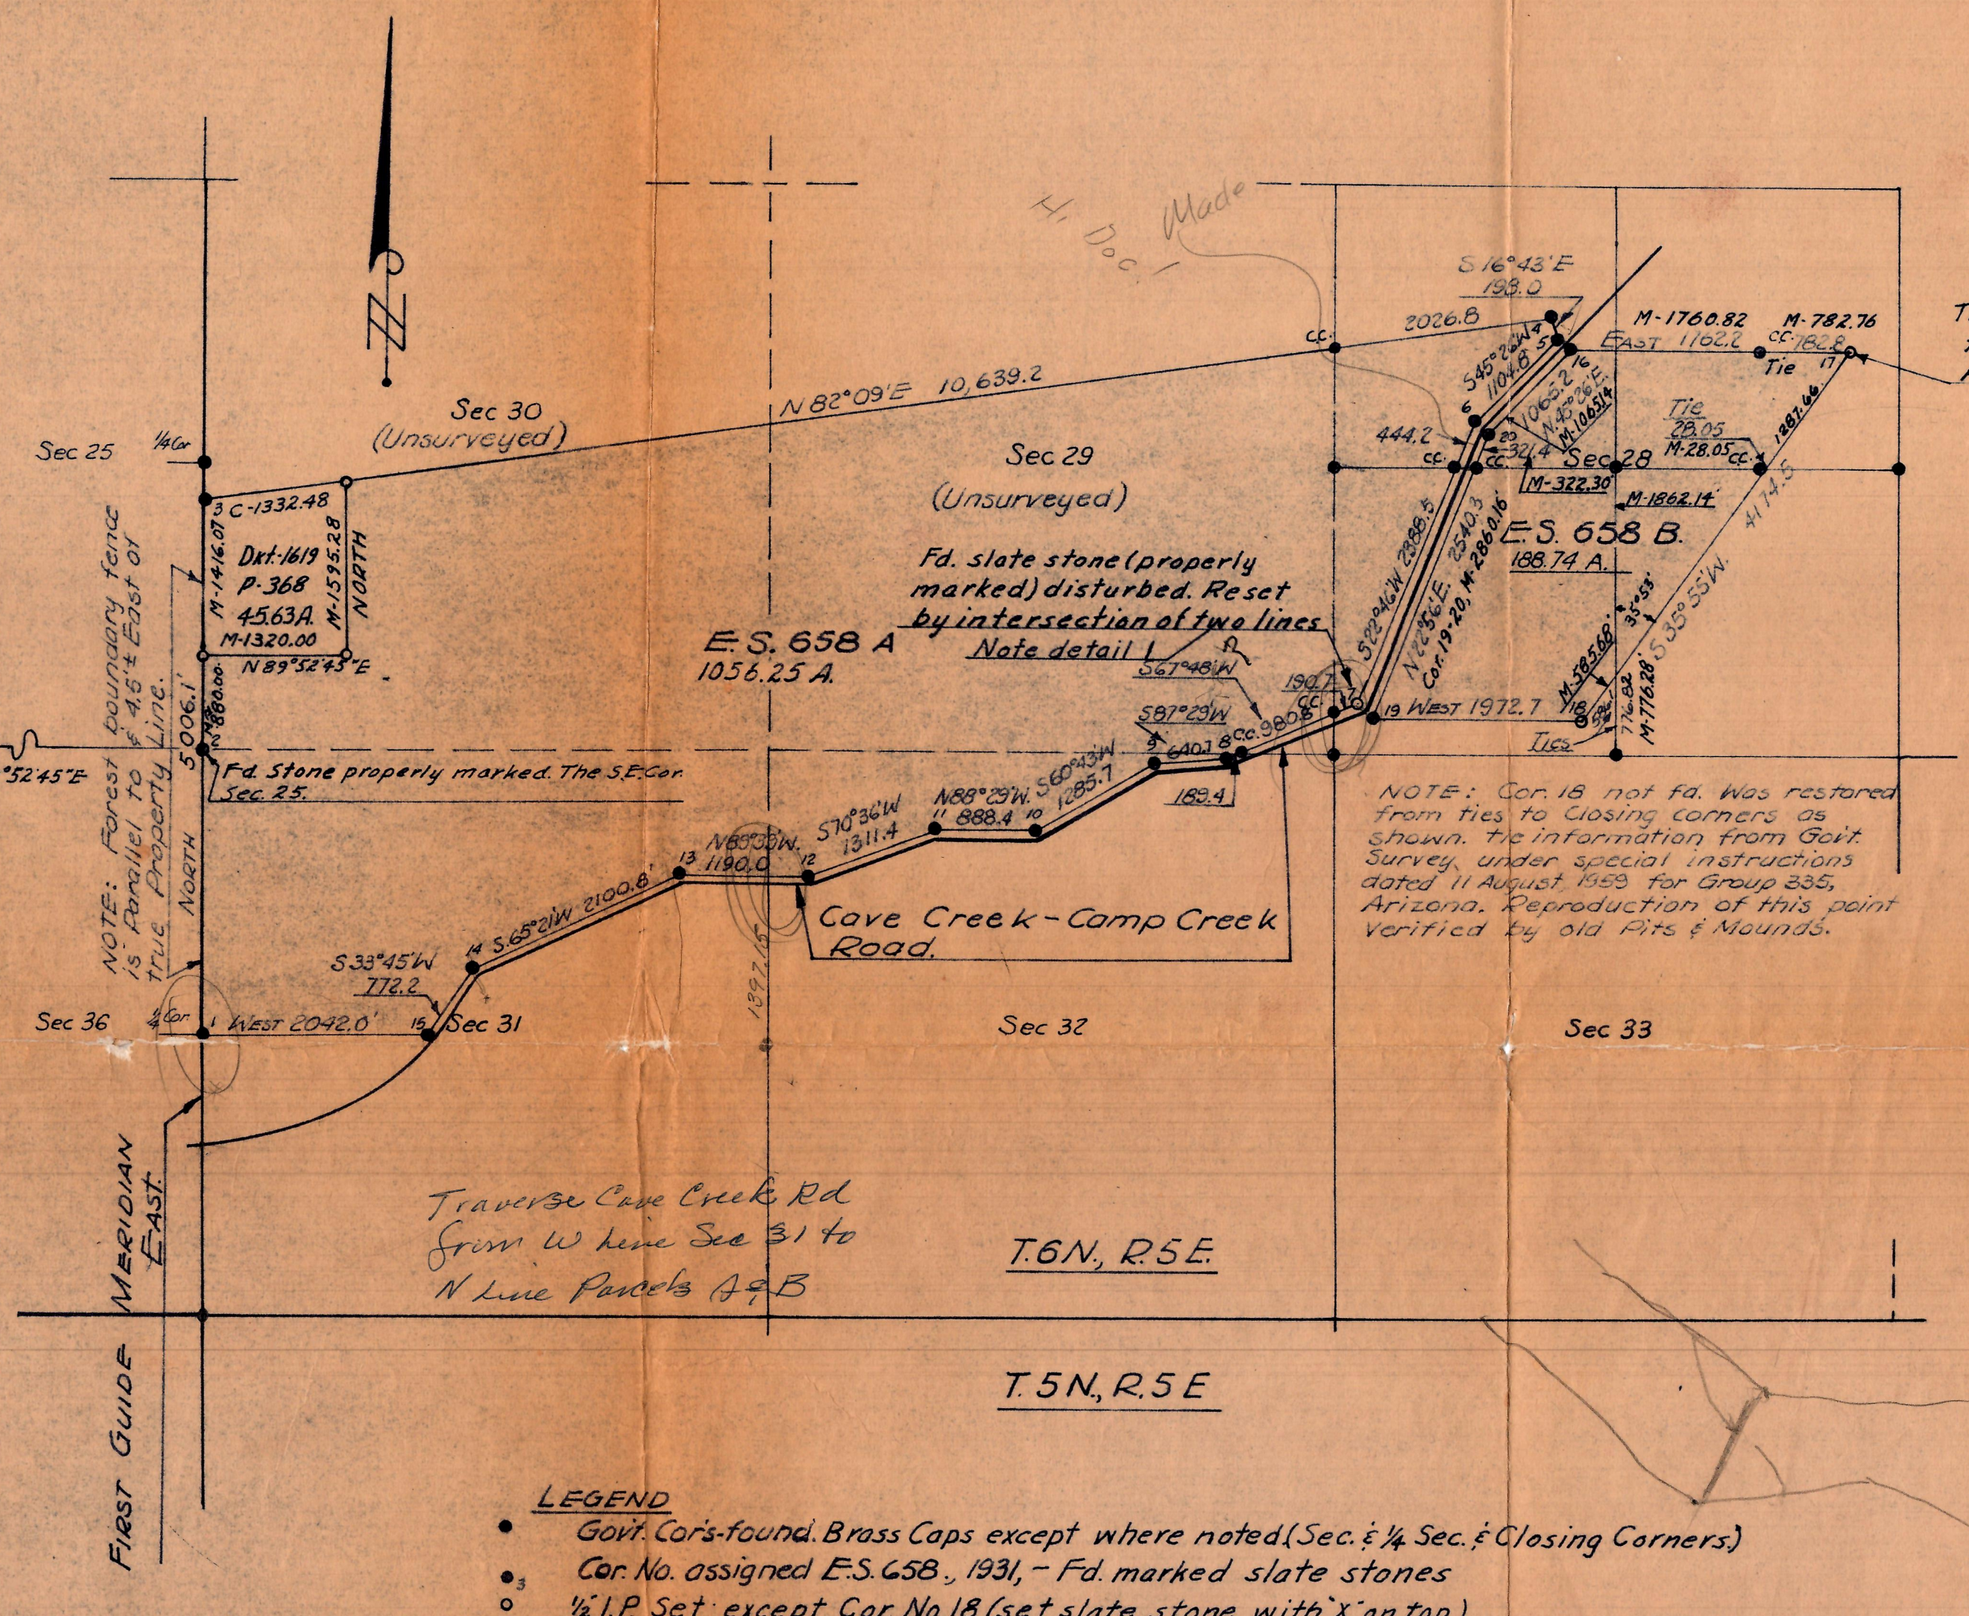

TABULATION OF INTERIOR ANGLES TURNED IN THE FIELD ON 658-B

Cor. No.	17	54°06'
" "	18	125°54'
" "	19	66°56'
" "	20	157°34'
" "	16	135°30'

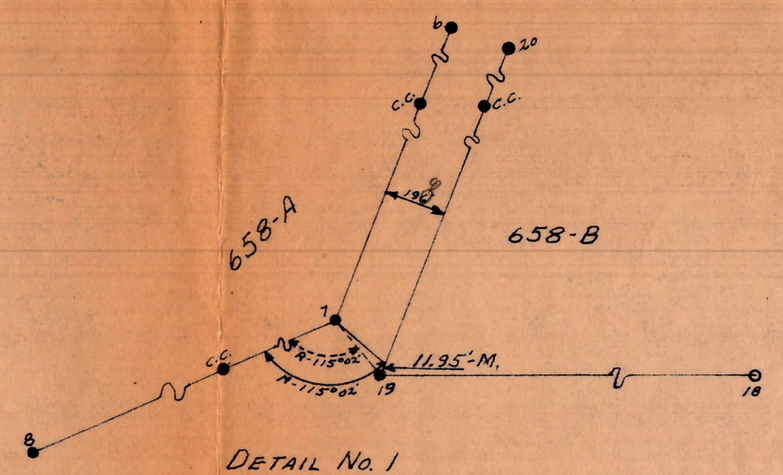

DETAIL No. 1

LEGEND

- ● Govt. Cor's found. Brass Caps except where noted (Sec. & ¼ Sec. & Closing Corners.)
- ●3 Cor. No. assigned E.S. 658., 1931, - Fd. marked slate stones
- ○ ½" I.P. Set, except Cor. No. 18 (set slate stone with "X" on top.)

NOTE: Areas, Bearings & Distances shown are B.L.M. Record. Distances have been converted from Chains to feet.

Note: B.L.M distance of 2640.00' between the South ¼ Sec. Cor. & the Center ¼ Sec. Cor. of Sec. 28 was used as basis for proportionate measurement along this line.

NOTE: Distances prefixed by "M-" denote chained in the field and those without "M-" denote distances from B.L.M. record of their Surveys of this property dated in 1931 & 1959. The angle denoted by "R" in Detail 1 is the difference between bearings of shown lines by B.L.M.

REGISTERED LAND SURVEYOR — EUGENE V. SKELLEY — EXPIRES DEC. 31, 1960 — ARIZONA

This is to certify that the survey hereon platted was made under my direction in May-November, 1960.

Eugene V. Skelley R.L.S.

DIN 59624

REPORT OF SURVEY

Of The tracts delineated in U.S.F.S. Exchange Surveys Nos. 658 A & B. Shown Lines, except West boundary of 658 A and the North Line of the Parcel delineated in Dkt. 1619, P-368, M.C.R. are staked for fencing.

For: Dr. DWIGHT G. HUDSON
SCOTTSDALE, ARIZONA.

ARIZONA SURVEYING SERVICE