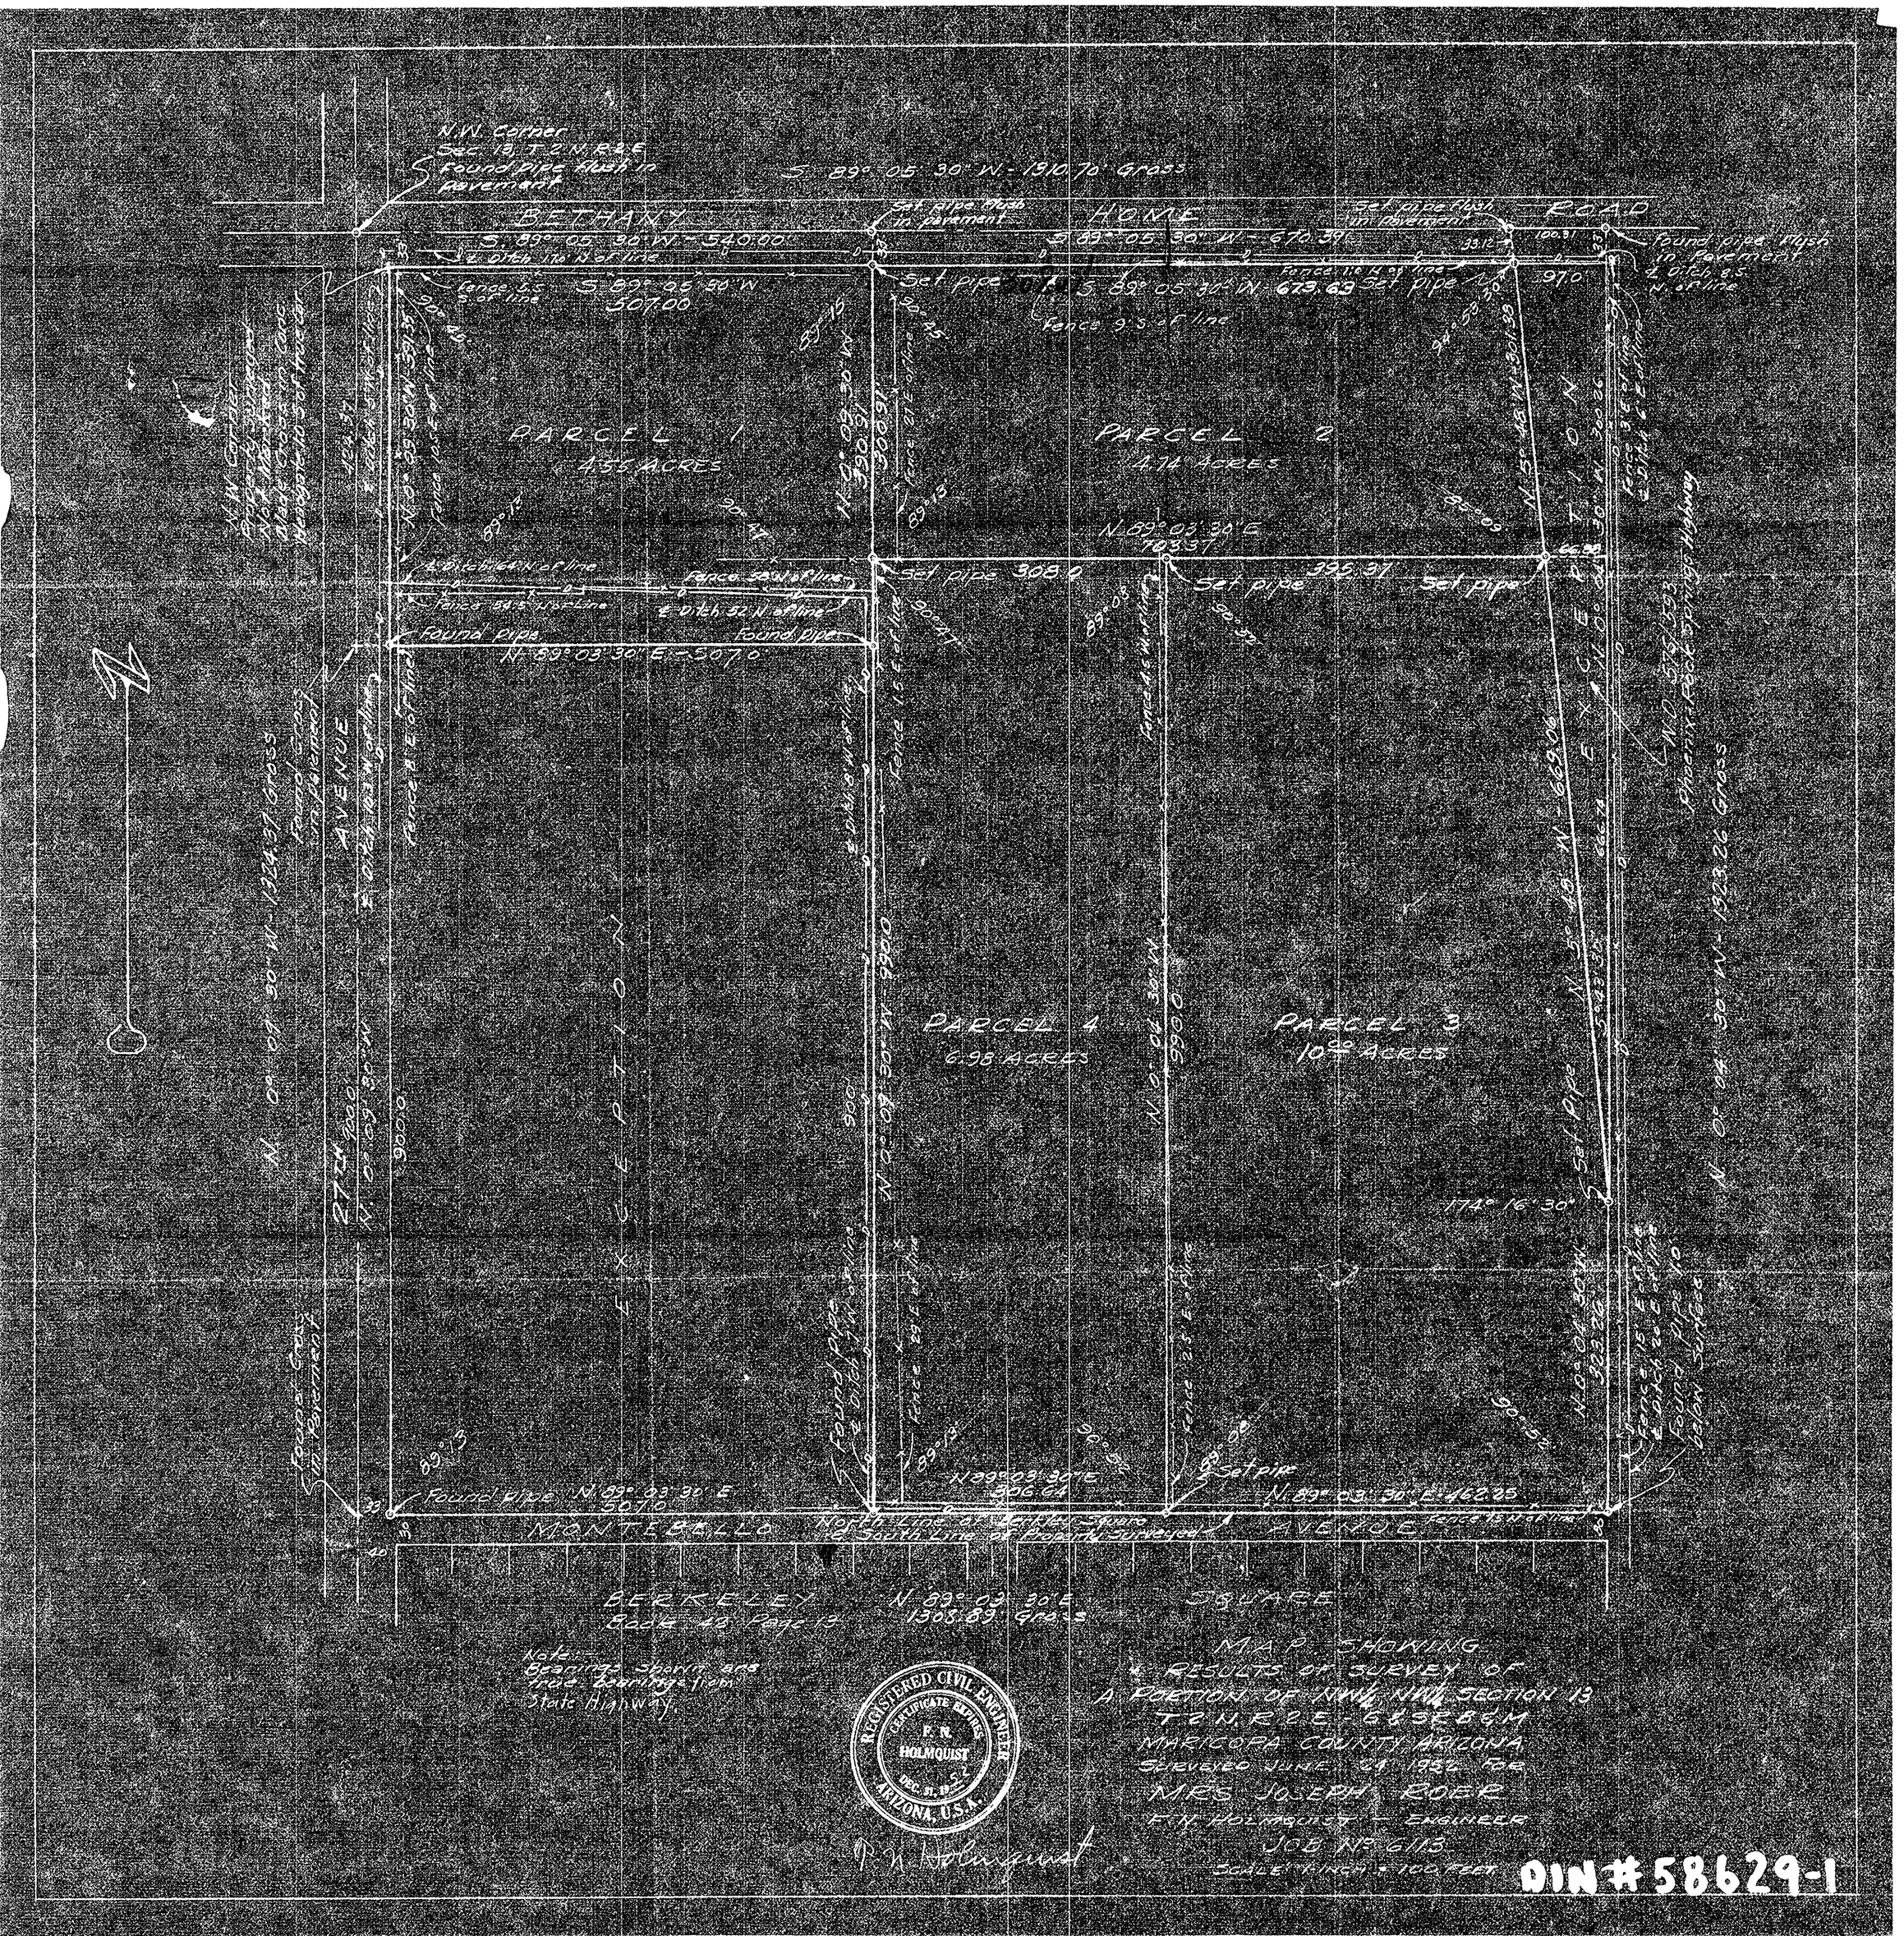
N.W. Corner
Sec. 13, T 2 N, R 2 E
Found pipe flush in pavement
S. 89° 05' 30" W. - 1310.70' Gross
BETHANY
HOME
ROAD
S. 89° 05' 30" W. - 540.00'
S. 89° 05' 30" W. - 670.39'
S. 89° 05' 30" W. 507.00
S. 89° 05' 30" W. 673.63
Set pipe flush in pavement
Found pipe flush in pavement
Set pipe
Fence 9.3' of line
PARCEL 1
4.55 ACRES
PARCEL 2
4.74 ACRES
N. 89° 03' 30" E
703.37
Set pipe 308.0
Set pipe
395.37
Set pipe
Found pipe
N. 89° 03' 30" E - 507.0
AVENUE
EXCEPTION
PARCEL 4
6.98 ACRES
PARCEL 3
10.00 ACRES
174° 16' 30"
Set pipe
Found pipe N. 89° 03' 30" E
507.0
N. 89° 03' 30" E
306.64
Set pipe
N. 89° 03' 30" E 462.25
MONTEBELLO
AVENUE
North Line of Bridge Square
& South Line of Property Surveyed
BERKELEY
Book 42 Page 13
N. 89° 03' 30" E
1308.89 Gross
SQUARE
Note:
Bearings shown are true bearings from State Highway.
REGISTERED CIVIL ENGINEER
CERTIFICATE EXPIRES
F. N. HOLMQUIST
DEC. 31, 1952
ARIZONA, U.S.A.
F. N. Holmquist
MAP SHOWING
RESULTS OF SURVEY OF
A PORTION OF NW¼ NW¼ SECTION 13
T 2 N, R 2 E - G & SR B & M
MARICOPA COUNTY ARIZONA
SURVEYED JUNE 24 1952 FOR
MRS JOSEPH ROER
F. N. HOLMQUIST - ENGINEER
JOB No 6113
SCALE 1 INCH = 100 FEET
DIN # 58629-1