# RESULTS of SURVEY of a portion of the Arizona Canal Diversion Channel and FCDMC Parcels lying within Sec. 1, T3N, R1E, G&SRB&M, Maricopa County, Arizona, Page 2 of 5

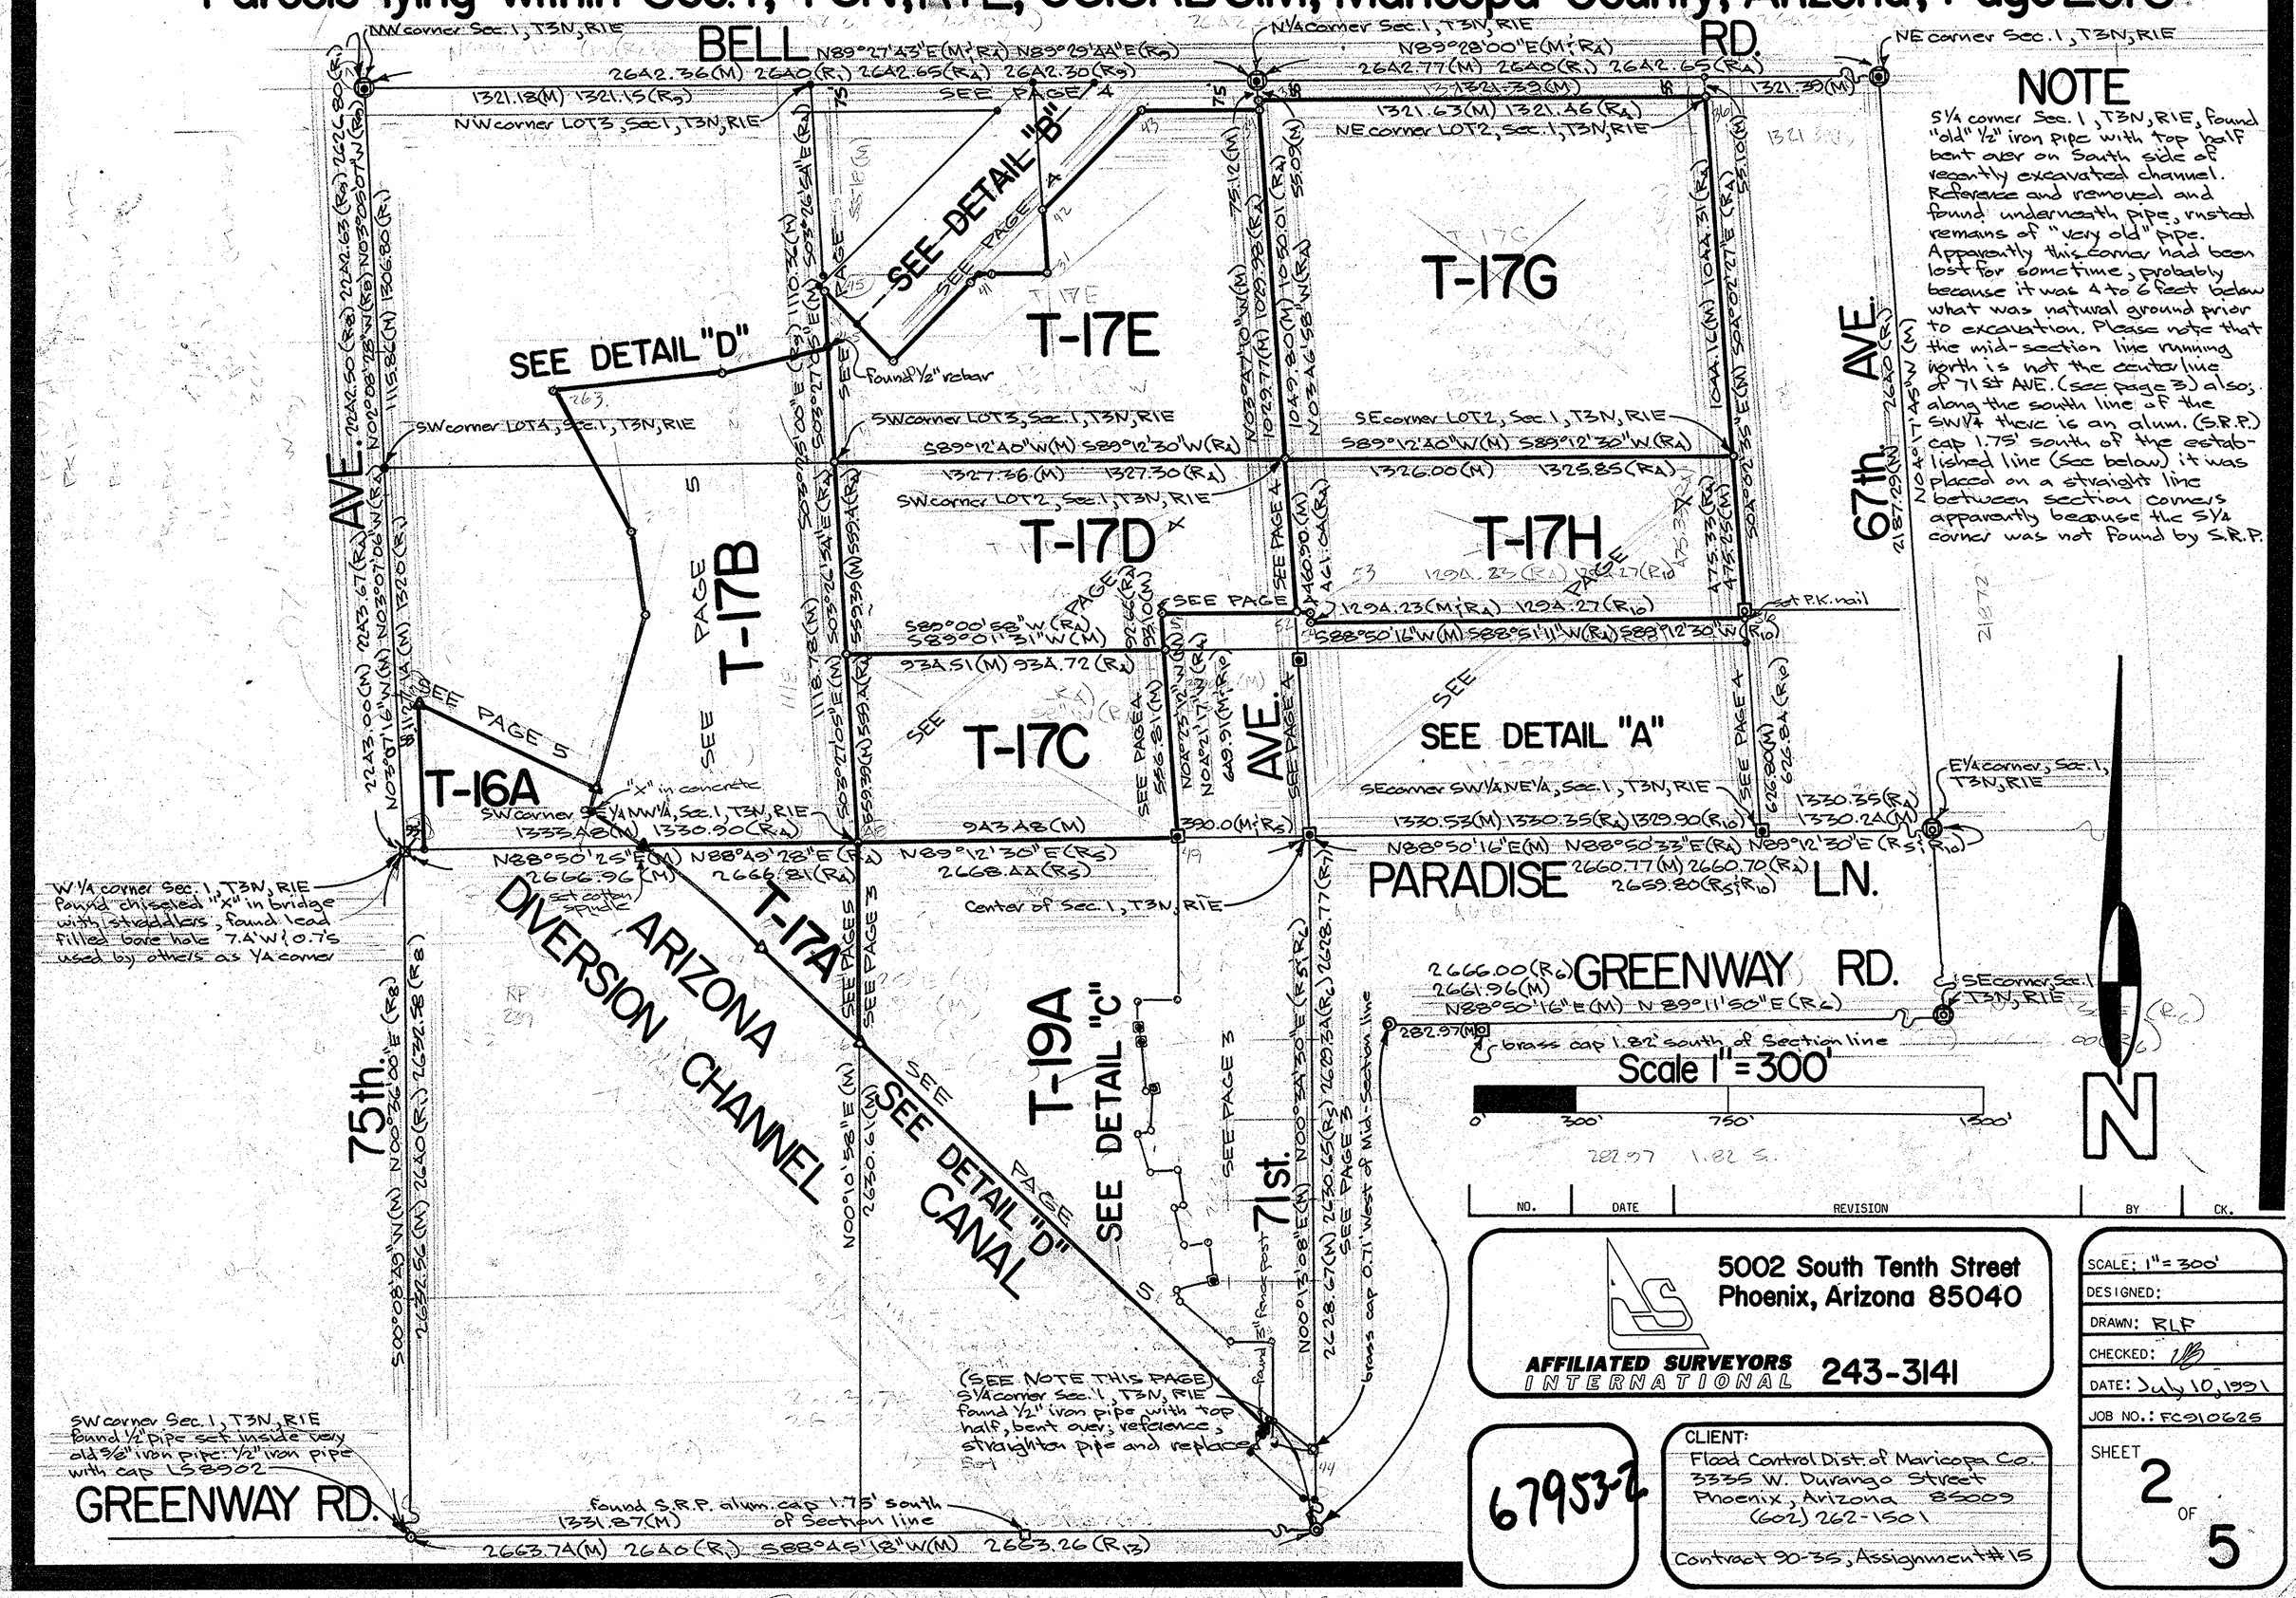


## NOTE

S1/4 corner Sec. 1, T3N, R1E, found "old" 1/2" iron pipe with top half bent over on South side of recently excavated channel. Reference and removed and found underneath pipe, rusted remains of "very old" pipe. Apparently this corner had been lost for some time, probably because it was 4 to 6 feet below what was natural ground prior to excavation. Please note that the mid-section line running north is not the center line of 71st AVE. (see page 3) also; along the south line of the SW1/4 there is an alum. (S.R.P.) cap 1.75' south of the established line (See below) it was placed on a straight line between section corners apparently because the S1/4 corner was not found by S.R.P.

| NO. | DATE | REVISION | BY | CK. |
|---|---|---|---|---|


AFFILIATED SURVEYORS INTERNATIONAL
5002 South Tenth Street
Phoenix, Arizona 85040
243-3141


679537

CLIENT:
Flood Control Dist. of Maricopa Co.
3335 W. Durango Street
Phoenix, Arizona 85009
(602) 262-1501

Contract 90-35, Assignment #15

SCALE: 1" = 300'
DESIGNED:
DRAWN: RLF
CHECKED:
DATE: July 10, 1991
JOB NO.: FC910625

SHEET 2 OF 5