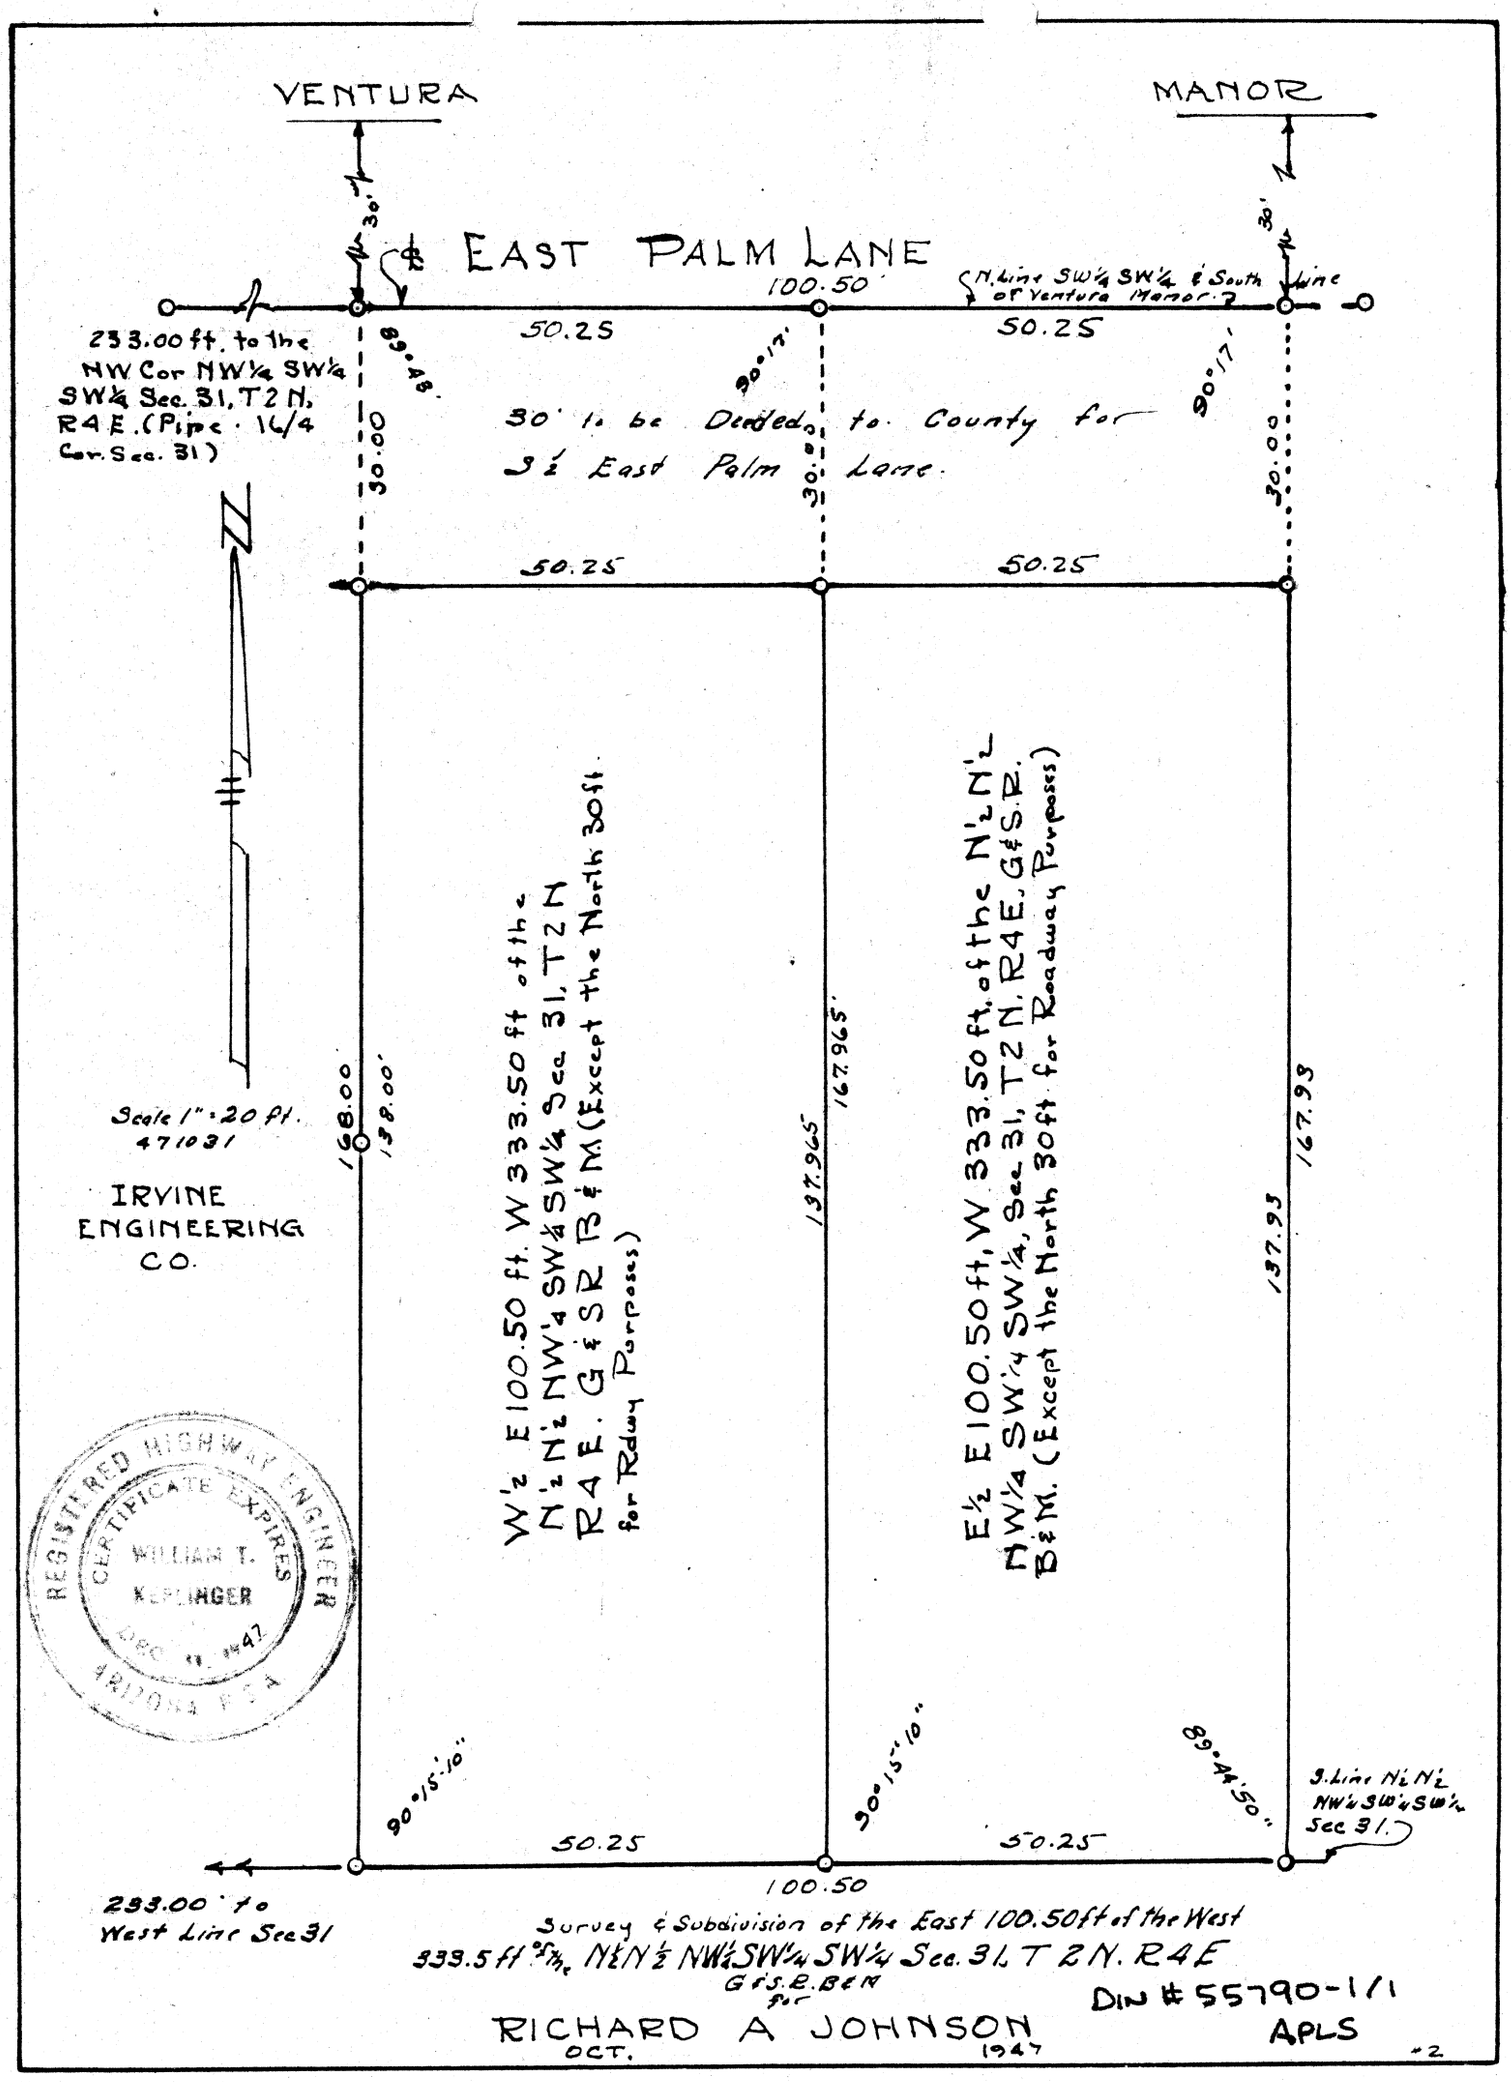
VENTURA
MANOR
30'
30'
℄ EAST PALM LANE
100.50'
N. Line SW¼ SW¼ & South Line of Ventura Manor
233.00 ft. to the NW Cor NW¼ SW¼ SW¼ Sec. 31, T2N, R4E. (Pipe 16/4 Cor. Sec. 31)
50.25
50.25
89°48'
90°17'
90°17'
30.00
30.00
30.00
30' to be Deeded to County for 3½ East Palm Lane.
50.25
50.25
N
Scale 1" = 20 ft.
471031
IRVINE ENGINEERING CO.
168.00
138.00'
W½ E100.50 ft. W 333.50 ft of the N½N½ NW¼ SW¼ SW¼ Sec 31, T2N R4E. G&SR B&M (Except the North 30 ft for Rdwy Purposes)
137.965
167.965'
E½ E100.50 ft, W 333.50 ft. of the N½N½ NW¼ SW¼ SW¼, Sec 31, T2N, R4E, G&S.R. B&M. (Except the North 30 ft for Roadway Purposes)
137.93
167.93
REGISTERED HIGHWAY ENGINEER
CERTIFICATE EXPIRES
WILLIAM T. KEPLINGER
DEC. 31, 1947
ARIZONA R.S.A.
90°15'10"
90°15'10"
89°44'50"
S. Line N½N½ NW¼ SW¼ SW¼ Sec 31.
50.25
50.25
100.50
233.00' to West Line Sec 31
Survey & Subdivision of the East 100.50 ft of the West
333.5 ft of the N½N½ NW¼ SW¼ SW¼ Sec. 31, T2N. R4E
G&S.R. B&M
for
RICHARD A JOHNSON
OCT. 1947
DIN # 55790-1/1
APLS
#2