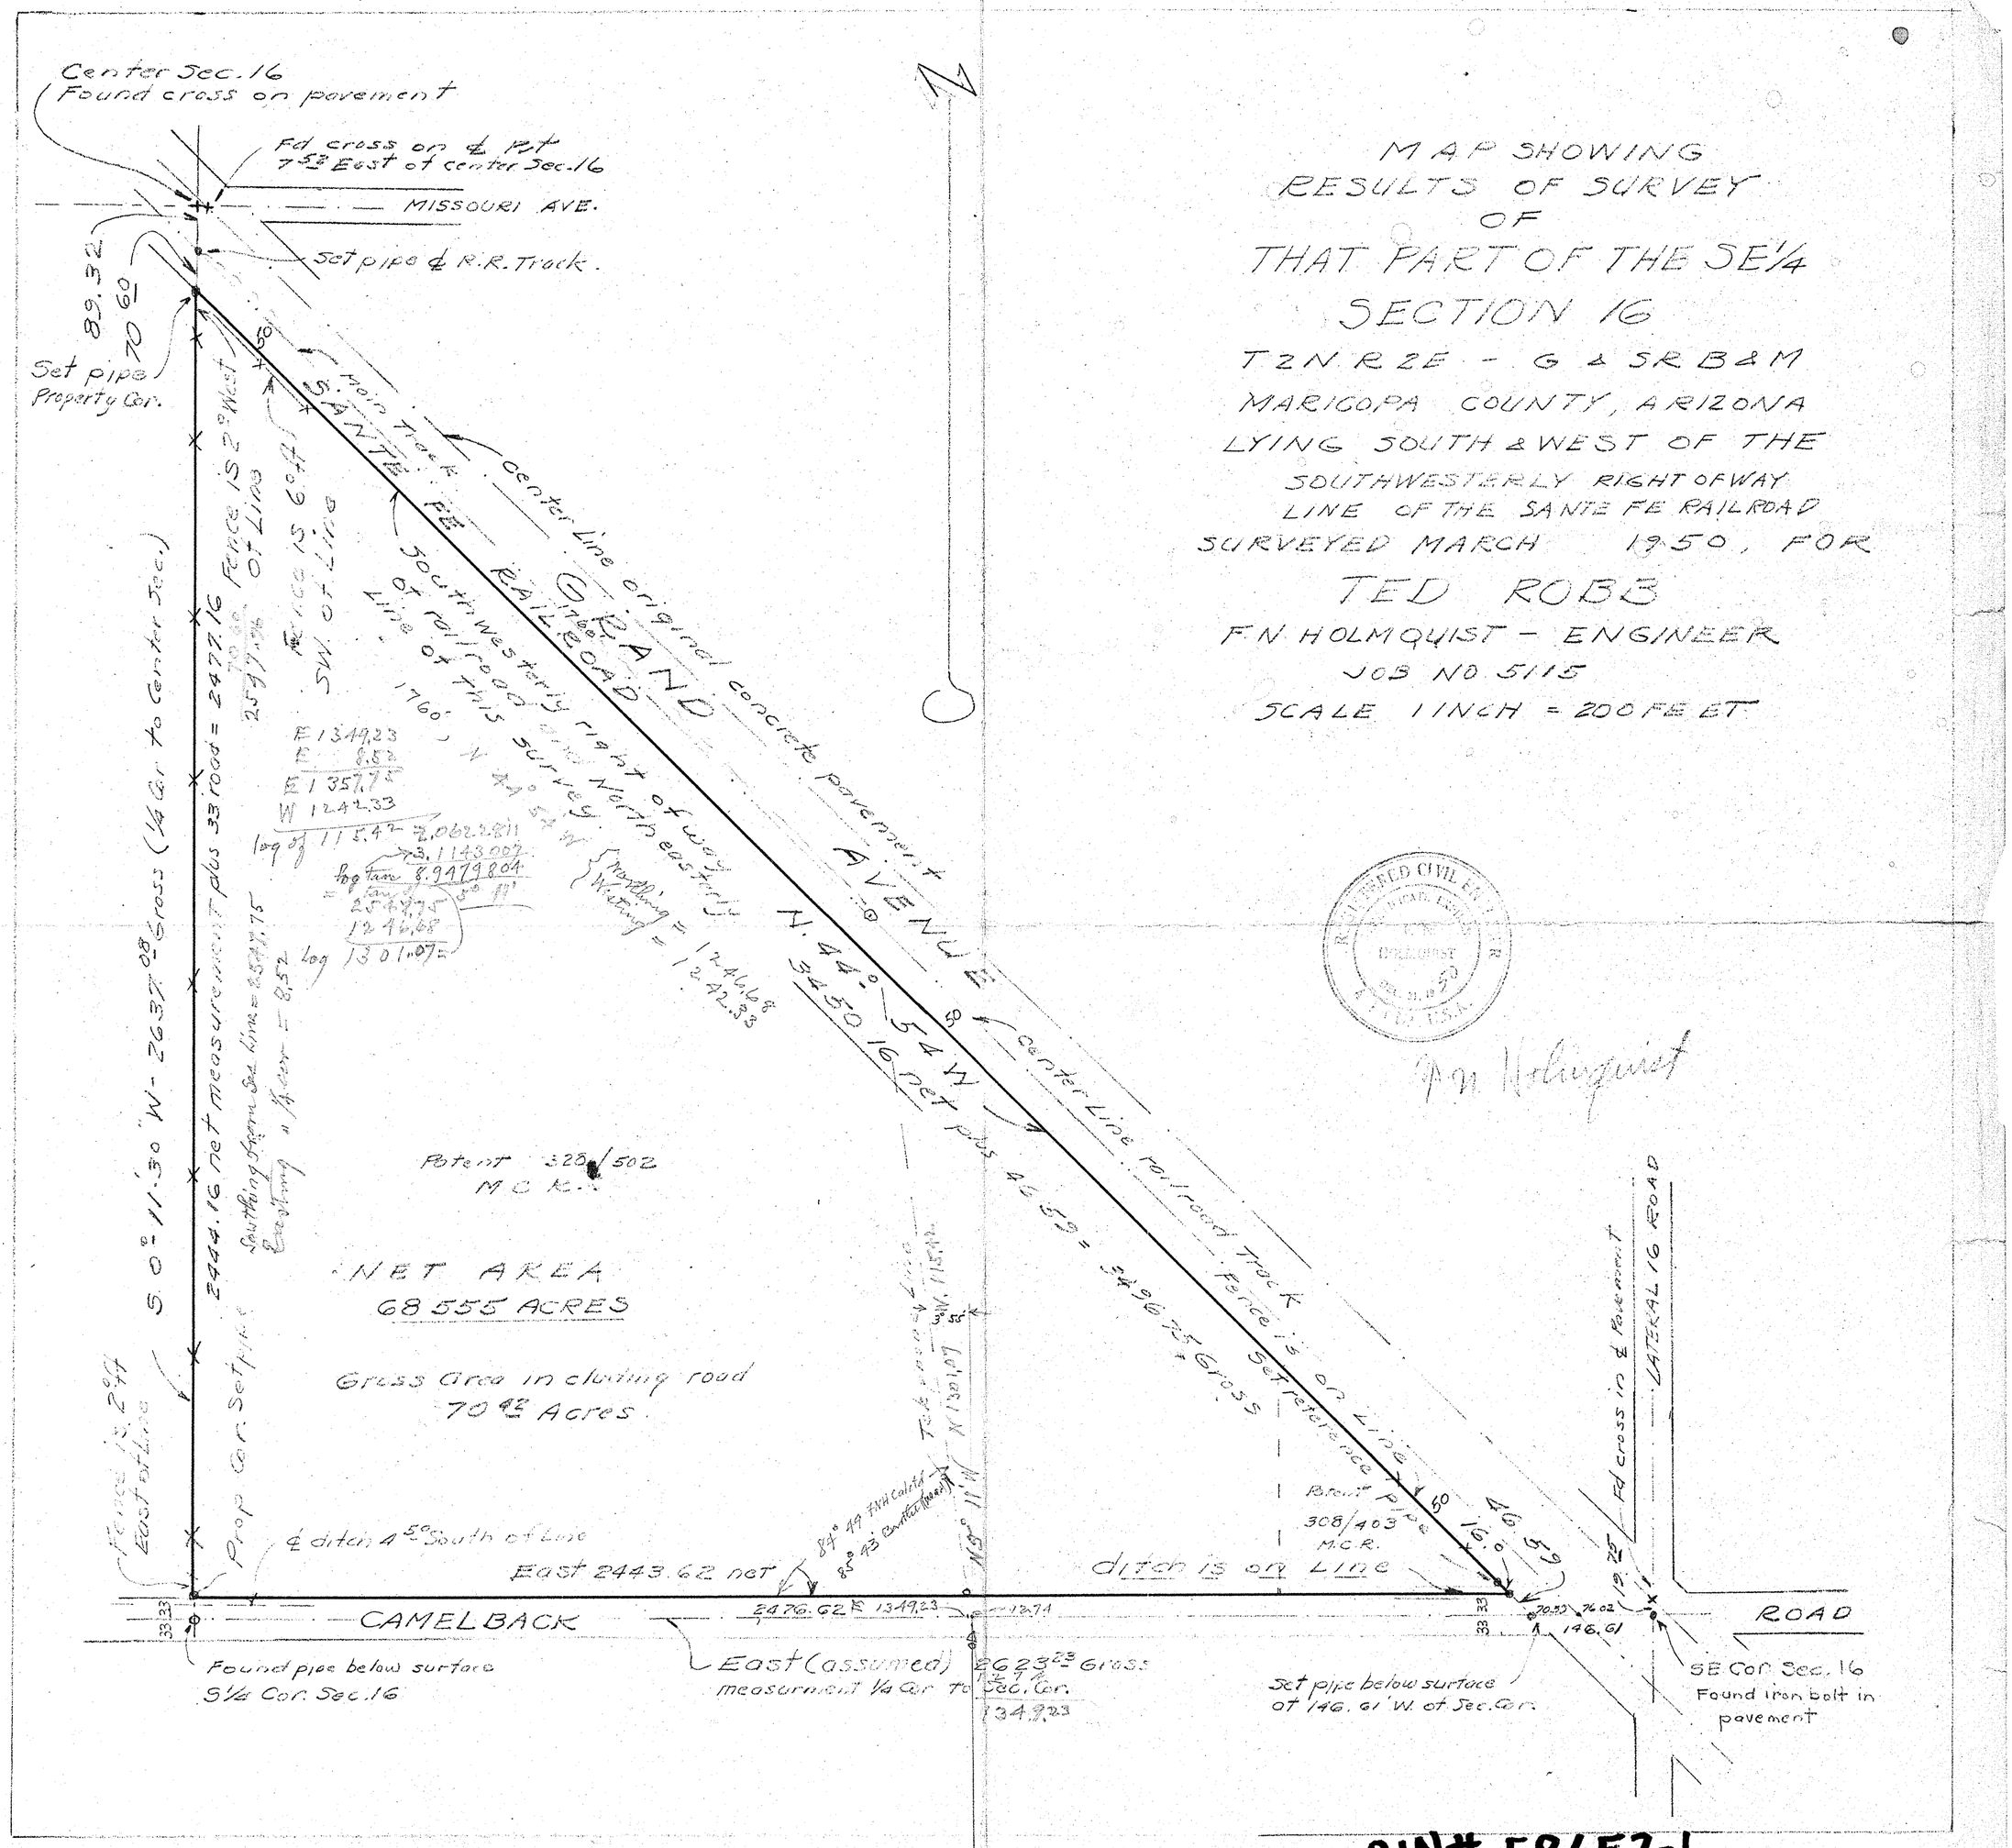
MAP SHOWING
RESULTS OF SURVEY
OF
THAT PART OF THE SE1/4
SECTION 16
T2N R2E - G & SR B&M
MARICOPA COUNTY, ARIZONA
LYING SOUTH & WEST OF THE
SOUTHWESTERLY RIGHT OF WAY
LINE OF THE SANTE FE RAILROAD
SURVEYED MARCH 1950, FOR
TED ROBB
F.N. HOLMQUIST - ENGINEER
JOB NO. 5115
SCALE 1 INCH = 200 FEET
Center Sec. 16
Found cross on pavement
Fd cross on ℄ Pvt
7.53 East of center Sec. 16
MISSOURI AVE.
Set pipe ℄ R.R. Track
89.32
70.60
Set pipe
Property Cor.
Main Track
SANTE FE RAILROAD
center line original concrete pavement
GRAND AVENUE
Fence is 2° West of Line
Fence is 6° ft SW. of Line
Southwesterly right of way of railroad and North easterly Line of this survey
1760'
N 44° 54' W
N. 44° 54' W
3450.16 net plus 46.59 = 3496.75 Gross
center Line railroad Track
Fence is on Line
Set reference pipe
46.59
16.0
Fd cross in ℄ Pavement
LATERAL 16 ROAD
S 0° 11' 30" W - 2637.08 Gross (1/4 Cor to Center Sec.)
2444.16 net measurement plus 33 road = 2477.16
Southing from Sec. Line = 2547.75
Easting " 1/4 cor = 8.52
Fence is 2° ft East of Line
Prop Cor. Set pipe
Patent 328/502
M.C.R.
NET AREA
68 555 ACRES
Gross Area including road
70.42 Acres
℄ ditch 4.50 South of Line
East 2443.62 net
84° 49' FNH Calcd
85° 43' Bartlett (road)
N 5° 11' W
Patent
308/403
M.C.R.
ditch is on Line
CAMELBACK
ROAD
2476.62 E 1349.23
12.74
70.53
76.02
146.61
19.75
Found pipe below surface
S1/4 Cor. Sec. 16
East (assumed) 2623.23 Gross
measurement 1/4 Cor to Sec. Cor.
1349.23
Set pipe below surface
at 146.61' W. of Sec. Cor.
SE Cor. Sec. 16
Found iron bolt in
pavement
REGISTERED CIVIL ENGINEER
HOLMQUIST
F.N. Holmquist

DIN# 58657-1