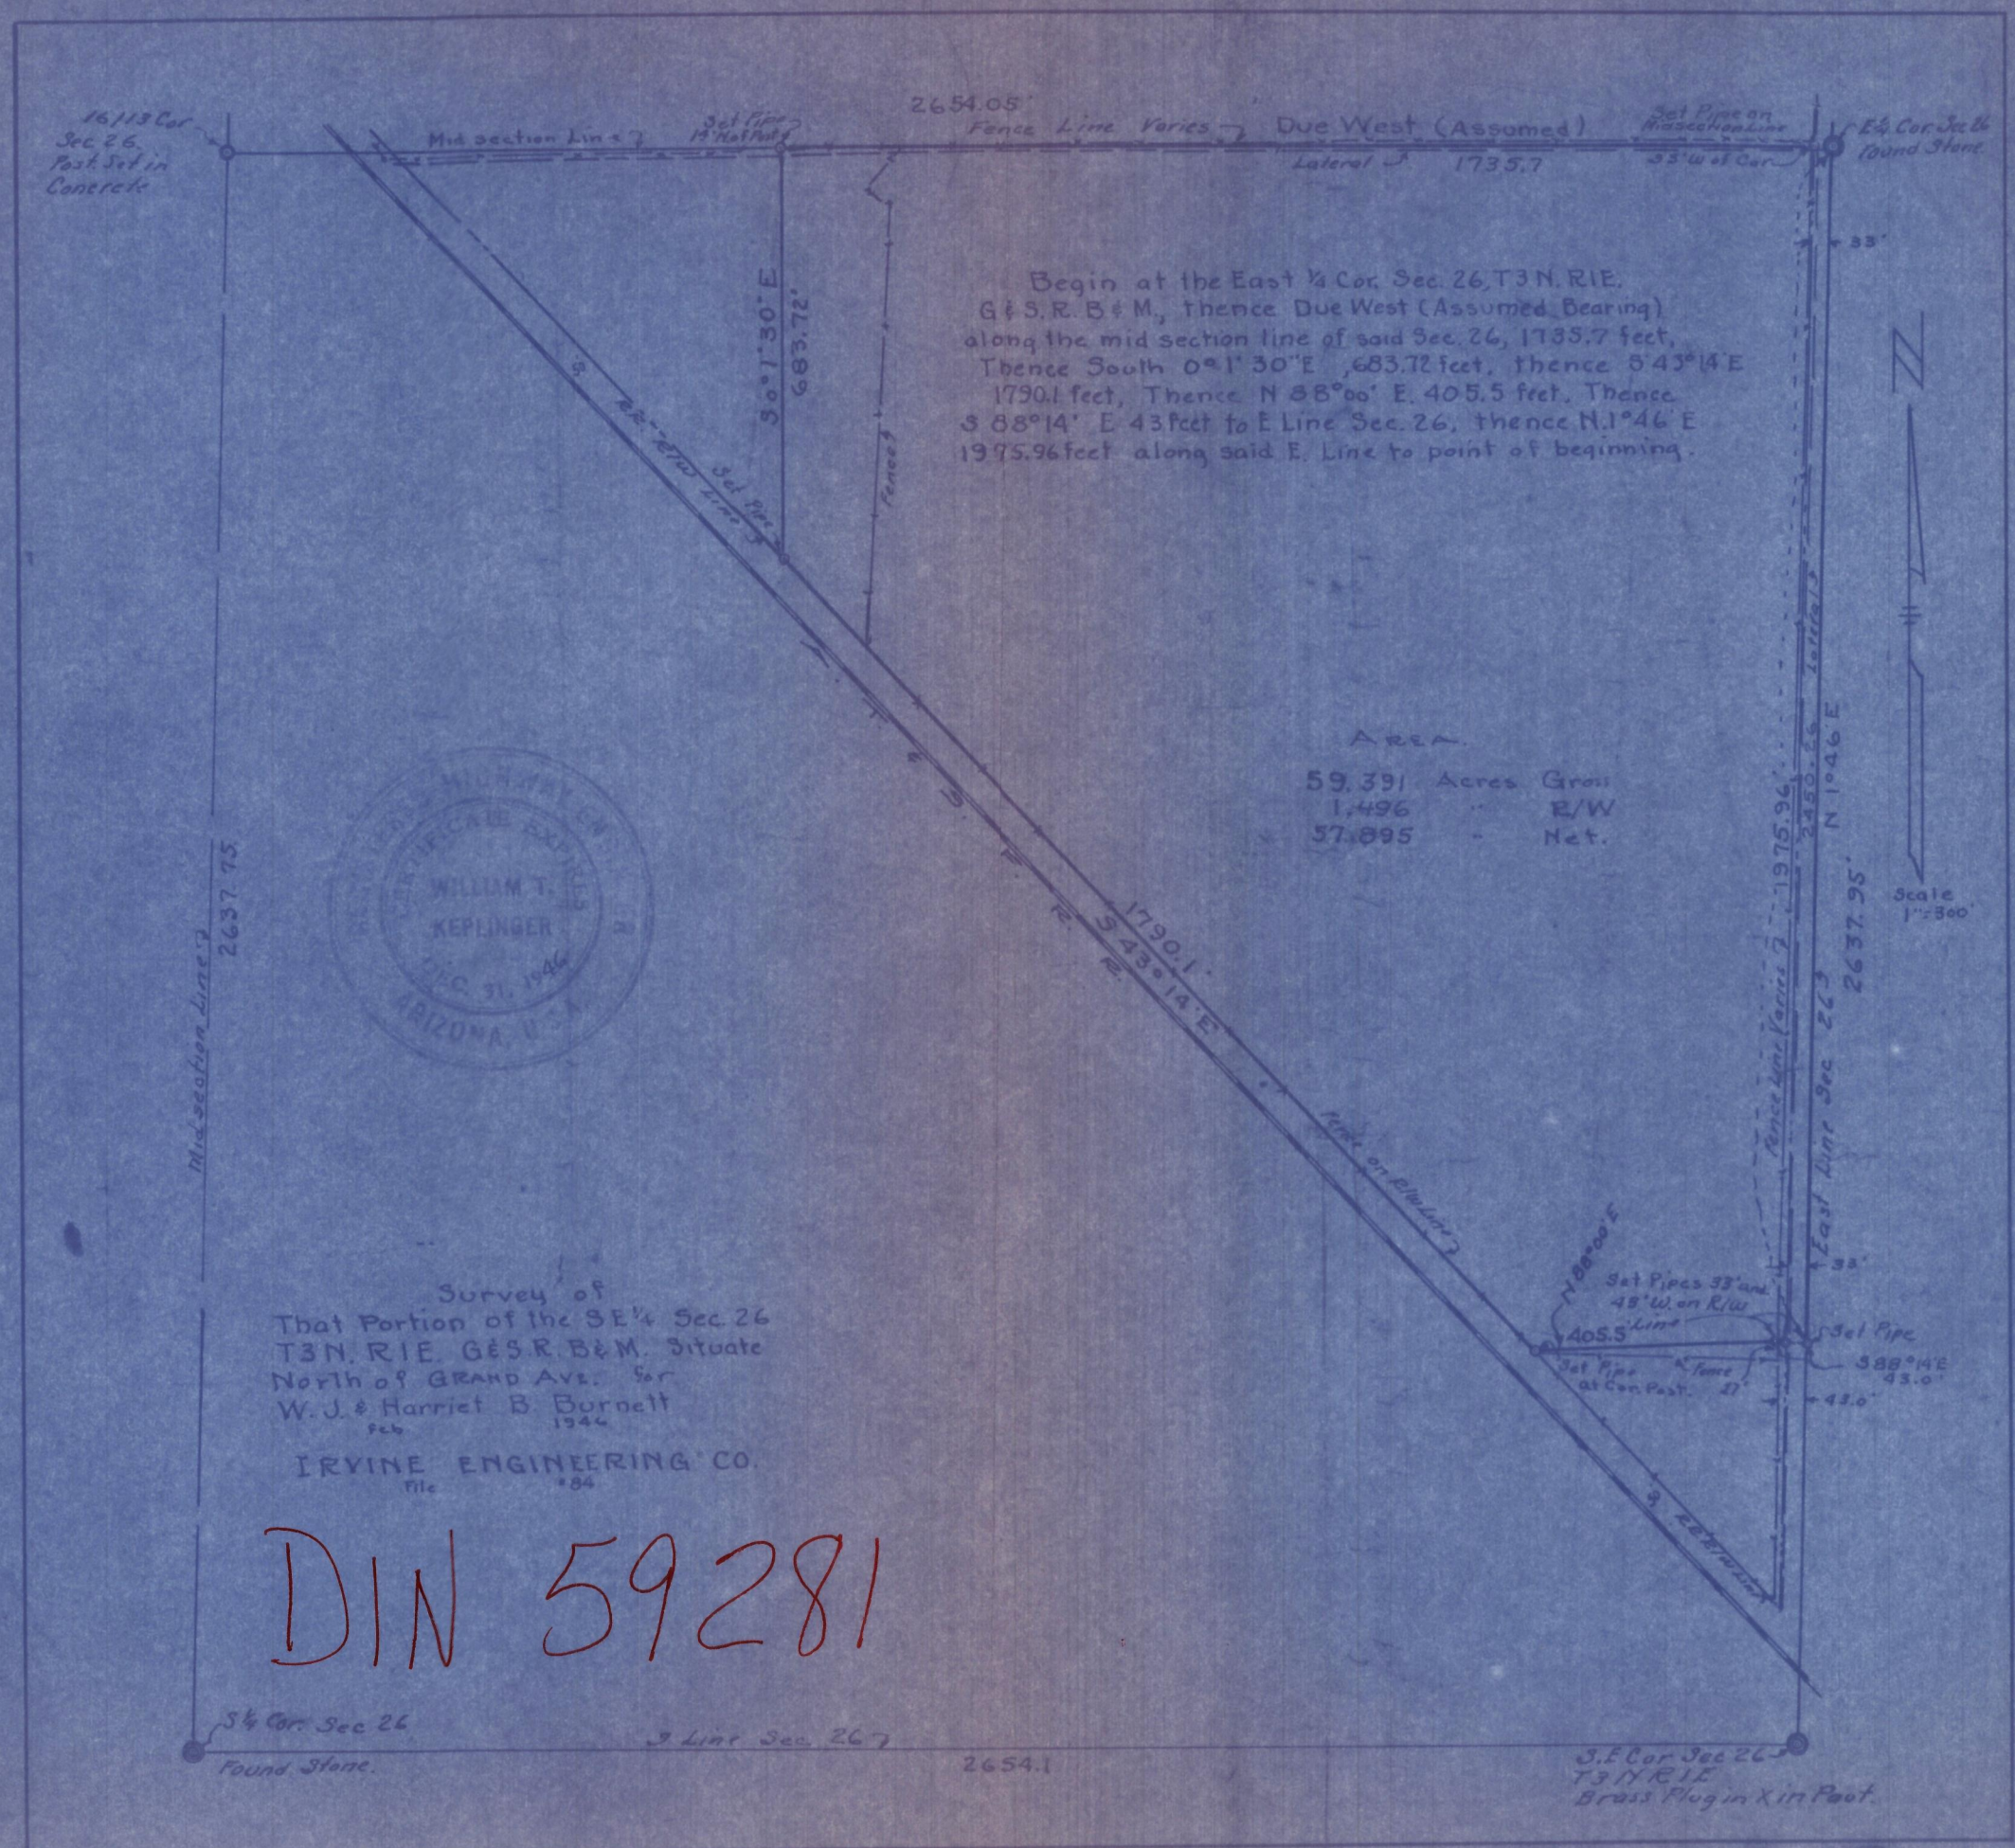
16/13 Cor Sec 26 Post Set in Concrete
Mid section Line
Set Pipe 14' N of Post
2654.05'
Fence Line Varies
Due West (Assumed)
Set Pipe on Mid section Line
E¼ Cor Sec 26 Found Stone
Lateral
1735.7
33' W of Cor
33'
Begin at the East ¼ Cor. Sec. 26, T3N. R1E. G&S.R.B&M., thence Due West (Assumed Bearing) along the mid section line of said Sec. 26, 1735.7 feet, Thence South 0°1'30"E, 683.72 feet, thence S 43°14'E 1790.1 feet, Thence N 88°00' E. 405.5 feet, Thence S 88°14' E 43 feet to E Line Sec. 26, thence N.1°46' E 1975.96 feet along said E. Line to point of beginning.
S 0°1'30" E
683.72'
Fence
Set Pipe
Area
59.391 Acres Gross
1.496 " R/W
57.895 " Net.
1790.1'
S 43°14' E
Fence on R/W Line
N 88°00' E
405.5'
Set Pipes 33' and 43' W. on R/W Line
Set Pipe
S 88°14' E 43.0'
Set Pipe at Cor. Post
Fence
27'
43.0'
Fence Line Varies
1975.96'
2450.26
N 1°46' E
2637.95'
East Line Sec 26
Lateral
Scale 1"=300'
Mid section Line
2637.75
Survey of That Portion of the SE¼ Sec. 26 T3N. R1E. G&S.R.B&M. Situate North of Grand Ave. for W. J. & Harriet B. Burnett Feb 1946
IRVINE ENGINEERING CO. File #84
S¼ Cor. Sec 26
Found Stone.
S Line Sec. 26
2654.1
S.E Cor Sec 26 T3N R1E Brass Plug in X in Post.

DIN 59281