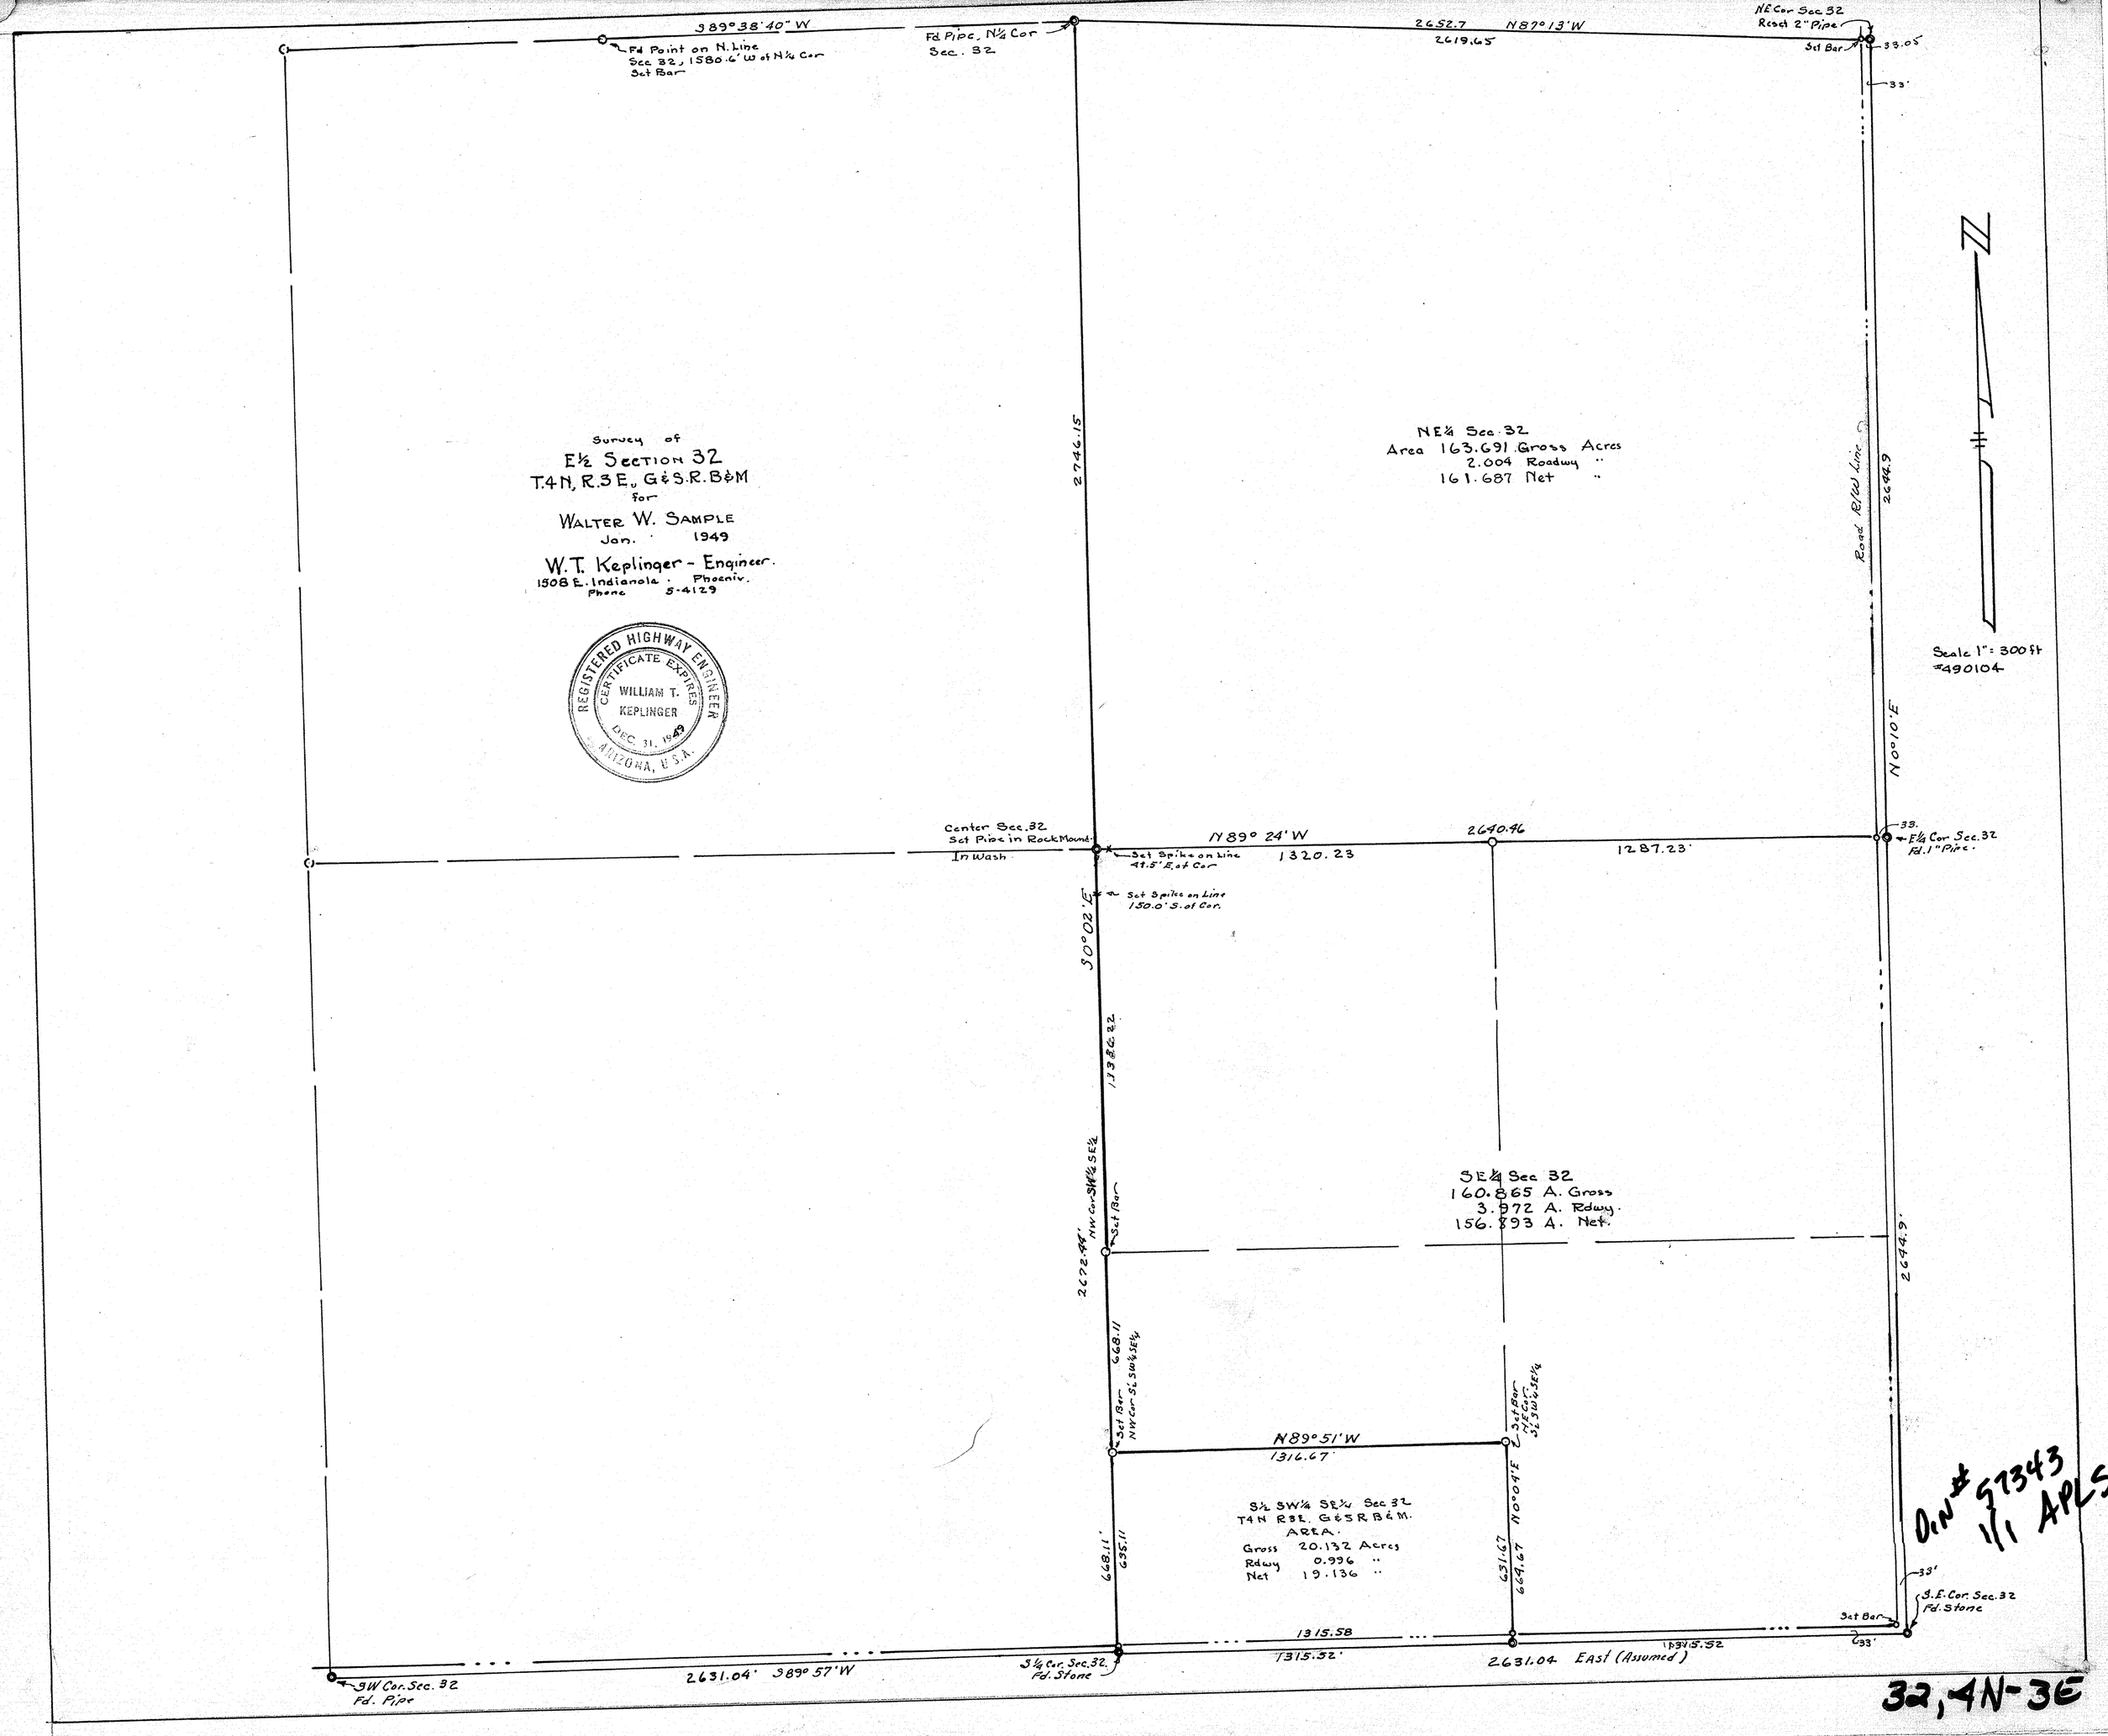
S89°38'40" W
Fd Point on N. Line
Sec 32, 1580.6' W of N¼ Cor
Set Bar
Fd Pipe, N¼ Cor
Sec. 32
2652.7
2619.65
N87°13'W
NE Cor Sec 32
Reset 2" Pipe
Set Bar
33.05
33'
Survey of
E½ Section 32
T.4N, R.3E., G&S.R.B&M
for
WALTER W. SAMPLE
Jan. 1949
W.T. Keplinger - Engineer.
1508 E. Indianola · Phoenix.
Phone 5-4129
REGISTERED HIGHWAY ENGINEER
CERTIFICATE EXPIRES
WILLIAM T.
KEPLINGER
DEC 31, 1949
ARIZONA, U.S.A.
2746.15
NE¼ Sec. 32
Area 163.691 Gross Acres
2.004 Roadway "
161.687 Net "
Road R/W Line
2644.9
N
Scale 1" = 300 ft
#490104
N0°10'E
Center Sec. 32
Set Pipe in Rock Mound
In Wash
Set Spike on Line
49.5' E. of Cor
N89° 24' W
1320.23
2640.46
1287.23'
33.
E¼ Cor Sec. 32
Fd. 1" Pipe.
Set Spike on Line
150.0' S. of Cor.
S0°02'E
1338.62
NW Cor SW¼ SE¼
Set Bar
2672.44'
SE¼ Sec 32
160.865 A. Gross
3.972 A. Rdwy.
156.893 A. Net.
2644.9
668.11
NW Cor S½ SW¼ SE¼
Set Bar
N89°51'W
1316.67'
Set Bar
NE Cor
S½ SW¼ SE¼
S½ SW¼ SE¼ Sec 32
T4N R3E. G&SRB&M.
AREA.
Gross 20.132 Acres
Rdwy 0.996 "
Net 19.136 "
N0°04'E
668.11'
635.11
631.67
669.67
Din # 97343
1/1 APLS
33'
S.E. Cor. Sec. 32
Fd. Stone
Set Bar
1315.58
1315.52'
1315.52
33'
2631.04' S89° 57'W
S¼ Cor. Sec. 32.
Fd. Stone
2631.04 East (Assumed)
SW Cor. Sec. 32
Fd. Pipe
32, 4N-3E